


LABORTOPS

SCROLL VACUUM PUMP SCROLLVAC 3S PLUS

- Wide range of applications
- Long life cycle
- Oil-free



New

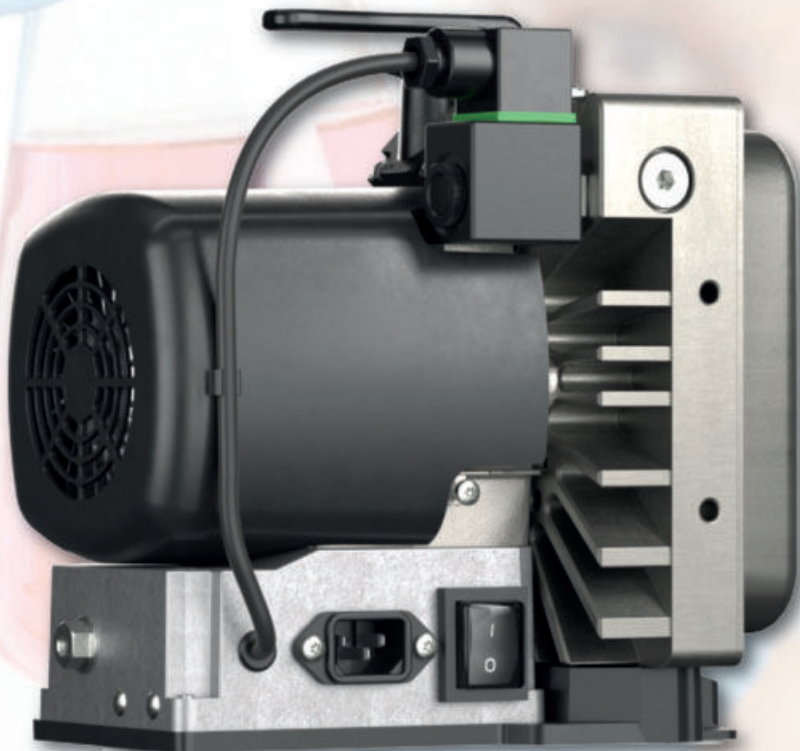

Page 3

Temperature Measurement	2	Occupational Safety	18
Vacuum Technology	3	Burner	19
General Laboratory Supply	4 - 5	Genomics / Proteomics	20
Chromatography	6	Cell Culture	21
Filtration	7	Microscopy	22
Glass ware	8 - 9	Spectroscopy	23
Sampling / Sample Preparation	10	Calibration Standards	24
Ultra Sonic	11	Weighing	25
Liquid Handling	12 - 13	Analytical Measurement	26
Cooling and Heating Technology	14 - 15	Centrifugation	27
Personal Protection	16	Heating / Incubation	28
pH Measurement	17	Stirring, Shaking, Mixing	29 - 32

Combi infrared and insertion thermometer TLC 750i-V2



-ebro-
Measurements for Life

Handy infrared thermometer for non-contact measurement of surface temperature or core temperature with the foldable insertion probe.

- Practical pocket size for daily use
- Backlit display allows reading in a dark environment
- Rotating display makes it easy to read the measured value
- Double laser pointer
- Optics 8:1
- HACCP and DIN EN 13485 compliant, incl. calibration certificate
- Waterproof housing (IP 65)

Temperature infrared: -50 ... 250 °C
 Resolution infrared: 0.1 °C
 Accuracy sensor: ±0.5 °C (-30 ... 99 °C)
 Accuracy infrared: ±1.0 °C (0 ... 65 °C)
 Dimensions (WxDxH): 44 x 170 x 23 mm
 Weight: 140 g

-20%

Type	PK	Cat. No.	Price	Now
			EUR	EUR
TLC 750i-V2	1	6.491 695	143,00	114,40

LLG-General-purpose thermometers, green filling



LLG
LABWARE

Glass, solid stem, with loop, white backed. Environmentally friendly thermometer, with biodegradable, green spirit filling.

-20%

Measuring range	Graduations	Length	PK	Cat. No.	Price	Now
°C	°C	mm			EUR	EUR
-10/0 ... 110	1.0	300	1	9.235 275	16,00	13,52
-10/0 ... 110	0.5	300	1	9.235 276	18,00	14,40
-10/0 ... 150	1.0	300	1	9.235 277	18,60	14,88
-10 ... 250	2.0	300	1	9.235 278	27,30	21,84
-10 ... 360	2.0	300	1	9.235 279	29,40	23,52

Temperature meter testo 110 Food



- Precise temperature measurement
- HACCP compliant
- Reports as PDF

testo



New

testo 110 Food Set

1-channel temperature measuring device for simple, fast and precise temperature measurement with external NTC or Pt100 temperature sensors. The temperature measuring device is certified to EN 13485 and HACCP-compliant.

Scope of supply testo 110 Food: Temperature meter, protective case TopSafe, calibration protocol, batteries (3 x AA).

Scope of supply testo 110 Food Set: Temperature meter, stainless steel food probe, protective case TopSafe, calibration protocol, batteries (3 x AA).

Protective case: with mounting magnets and stand-up bracket. Protects the device from impact and dirt.

-5%

Type	External dimensions (W x D x H) mm	Dim. Probe (Ø x L) mm	PK	Cat. No.	Price	Now
					EUR	EUR
testo 110 Food	60 x 28 x 135	-	1	4.701 464	153,00	145,35
testo 110 Food Set	60 x 28 x 135	4 x 125	1	4.701 465	226,00	214,70
Protective case	-	-	1	4.701 466	38,00	36,10

LLG-Adapter for thermometer, borosilicate glass 3.3



LLG
LABWARE

Adapter for securing thermometers. With compression screw cap and O-ring.

-20%

Ground size	Adapter bore diam. mm	Neck thread	PK	Cat. No.	Price	Now
		GL			EUR	EUR
NS						
14/23	6	14	2	4.686 179	20,40	16,32
29/32	6	14	2	4.686 178	25,30	20,24


Scroll vacuum pump
SCROLLVAC 3S plus



- Low final pressure
- Low noise
- Low maintenance



New

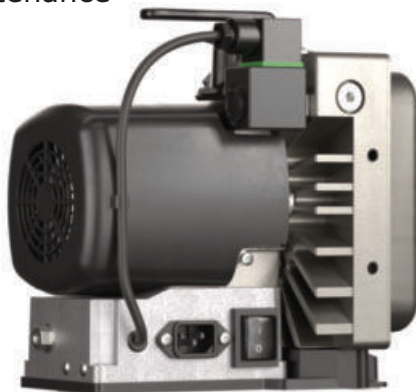

The oil-free, dry-compressing vacuum pump works on the principle of a scroll compressor and combines a high pumping speed with a good ultimate vacuum. Ideal for small laboratories as well as applications in research and development. The integrated exhaust valve provides effective protection against a rapid pressure rise in the event of a power failure.

- Powerful, dry-operating alternative to diaphragm pumps
- Can be operated horizontally or vertically
- Compact design with low-weight
- Max. pump speed of 3 m³/h
- Build-in manual gas ballast
- Long maintenance intervals due to oil-free operation, low maintenance
- Low vibration and quiet operation

Specifications

Ultimate vacuum: 0.1 mbar
 Ultimate vacuum with gas ballast: 0.15 mbar
 Connection on suction side: KF DN 16
 Noise level: 54 db(A)

-25%

Type	Plug type	Dimensions (W x D x H) mm	PK	Cat. No.	Price EUR	Now EUR
SCROLLVAC 3S plus	EU	158 x 224 x 231	1	4.700.564	4.148,20	3.111,15

Digital vacuum gauge
THERMOVAC TM 101



The temperature-compensated vacuum gauge is used for absolute pressure measurement. It can be used as a mobile hand-held gauge or as an instrument permanently integrated into a system. The integrated memory function stores up to 2000 measured values.

- For rough and fine vacuum measurements
- Large display
- Can be used directly in a vacuum
- Adjustable gas type correction factor
- Pressure unit selectable between mbar, Torr, and Pascal
- Incl. 9 V block battery 6LR61

Type	Dimensions (W x D x H) mm	PK	Cat. No.	Price EUR	Now EUR
THERMOVAC TM 101	60 x 25 x 120	1	4.700.538	1.549,00	1.049,00

Diaphragm vacuum pumps
LABOPORT® N820G/N840G,
chemically-resistant



The compact pumps feature a control knob for manual adjustments of the flow rate, making them well-suited to a wide variety of applications. Due to the manual rotational speed control, the pumps are quiet, very energy efficient, and can be optimally adjusted following the application.

- Easy-to-clean surface
- The combination of PTFE pump head and PTFE-coated diaphragm makes the pump ideal for extremely aggressive/corrosive gases and vapours
- High level of compatibility with vapour and condensation
- Integrated gas ballast valve
- 3-color status display: In operation/Stand-by/Error
- ATEX-compliant by II 2/-G IIB+H2 T3 internal atmosphere only


Specifications

Ultimate vacuum (abs.): 6 mbar
 Operating pressure: 0.1 bar
 Connectors for tube: ID 9/10 mm
 Permissible ambient temperature: 5 ... 40 °C
 Pump head: TFM™ PTFE
 Diaphragm: PTFE-beschichtet
 Valves: FFPM

-15%

Type	Flow rate L / min.	Dimensions (W x D x H) mm	PK	Cat. No.	Price EUR	Now EUR
N820G	20	163 x 259 x 220	1	4.672.375	2.049,00	1.741,65
N840G	34	177 x 289 x 240	1	4.672.376	2.256,00	1.917,60

Vacuum tubing, rubber (NR)



Red. Durometer 45 Shore A.

-35%

Int. diam. mm	Wall thickness mm	PK	Cat. No.	Price EUR	Now EUR
6	5	10	9.205.812	231,00	150,15
8	5	10	9.205.814	305,00	198,25

Mini coolers, PC



Mini coolers are designed to protect a wide range of solutions (enzymes, DNA, RNA, cell suspensions) by helping to maintain freezer temperatures on the lab bench. Durable polycarbonate filled with non-toxic gel. Mini coolers hold twelve 0.5 ml to 2.0 ml tubes.

				-15%	
Colour	Temperature-maintained on lab bench	PK	Cat. No.	Price	Now
				EUR	EUR
Red	0 °C, up to 60 min	1	6.802 253	111,90	95,12
Yellow	-20 °C up to 60 min	1	7.300 442	111,90	95,12
White	-70 °C up to 45 min	1	7.090 437	111,90	95,12

LLG-Multipurpose containers, PP, with screw cap

! Made in the EU



New



Transparent multipurpose containers with red screw caps made of PE. Universally applicable, e.g. for storing or transporting samples. With graduation and frosted labelling field.

For research and development only.

				-25%	
Nominal capacity	Sterile	PK	Cat. No.	Price	Now
				EUR	EUR
60*	no	500	4.694 707	112,30	84,23
60*	yes	500	4.694 708	127,60	95,70
120*	no	250	4.694 710	63,30	47,48
120*	yes	250	4.694 711	97,00	72,75
60	no	600	4.694 706	127,60	95,70
120	no	300	4.694 709	68,40	51,30

* individually wrapped

Measuring jugs, PP



Transparent. With a stable handle and easily readable, printed black graduations on both sides. Therefore, the volume is equally visible for left- and right-handers. To preserve markings, do not clean at temperatures exceeding 60 °C.

- Stackable
- Food-safe product according to regulation (EU) No. 10/2011

						-12%	
Nominal capacity	Grad.	Ext. diam.	Height	PK	Cat. No.	Price	Now
						EUR	EUR
250	5	75	115	5	9.275 738	18,50	16,28
500	10	97	140	5	9.275 740	20,00	17,60
1000	10	125	167	5	9.275 742	28,50	25,08
2000	20	148	212	2	9.275 744	33,20	29,42
3000	50	170	242	2	9.275 746	31,40	27,63

Wide-mouth bottles, HDPE, with screw cap, PP



Ideal for sampling, storing, and transporting liquid, pasty and granulated products. Food safe. The batch certificate is available to download. Transparent.

						-20%	
Capacity	Diam.	Thread external diam.	Height	PK	Cat. No.	Price	Now
						EUR	EUR
30	32	29.6	70	10	6.253 645	11,30	9,04
60	40	29.6	82	10	6.253 646	12,60	10,08
100	51	36.9	89	10	6.253 178	13,00	10,40
125	51	36.9	104	10	6.252 222	13,80	11,04
150	51	36.9	116	10	6.254 042	15,00	12,72
250	60	43.1	140	10	6.256 221	28,60	22,88
500	75	53.0	161	10	6.252 111	35,20	28,16
1000	90	61.6	205	5	6.252 112	49,60	39,68
2000	120	61.6	242	5	6.253 038	58,40	46,72

Lab storage system MagLab, magnetic



MagLab Series

Features four powerful magnets for a secure hold onto most metal surfaces, or create your holding point with the metal plate provided.

- MagRack holds four 50 mL tubes and nine 15 mL tubes (Part of the MagLab series Cat. No. 6.254 581, not to be purchased individually)
- MagWipe holds a wipe box (110 x 210 mm)
- MagPette holds two common pipettors
- MagBox holds miscellaneous accessories
- MagLab Series incl. MagRack, MagWipe, MagPette, MagBox
- Incl. self-adhesive metal plate

-15%

Type	Colour	Dimensions (W x D x H) mm	PK	Cat. No.	Price	Now
MagLab Series	assorted	-	4	6.254 581	EUR 80,40	EUR 68,34
MagWipe	green	130 x 91 x 98	1	6.254 583	EUR 23,20	EUR 19,72
MagPette	purple	131 x 112 x 76	1	6.254 584	EUR 23,20	EUR 19,72
MagBox	orange	130 x 78 x 102	1	6.254 585	EUR 23,20	EUR 19,72

Assortment box, ABS



Kit B

- Replaceable inserts
- Compartment for a sharps container
- With supply drawer
- Built-in side pockets offer additional storage space
- The handle includes a soft rubber grip to reduce hand and finger strain

Scope of supply: Tray, 13 or 16 mm OneRack® tube rack, 2 x disposable polystyrene inserts

-15%

Type	Description	Dimensions (W x D x H) mm	PK	Cat. No.	Price	Now
Kit A	Insert for 13 mm Tube Rack	429 x 265 x 172	1	6.243 252	EUR 124,10	EUR 105,49
Kit B	Insert for 16 mm Tube Rack	429 x 265 x 172	1	6.238 550	EUR 117,60	EUR 99,96

Label printer
DYMO® LabelWriter™ 550 Turbo



- Ethernet interface enables LAN network connectivity

Scope of supply: Label printer, 1 x label starter roll (28 x 89 mm), power adapter, power cable, USB cable, quick start guide

Max. label width: 59 mm
Print speed: 90 labels/min.
Weight: 645 g
Power supply: 24 V, 2.5 A

-10%

Type	External dimensions (W x D x H) mm	PK	Cat. No.	Price	Now
DYMO® LabelWriter™ 550 Turbo	127 x 187 x 136	1	4.687 586	EUR 182,00	EUR 163,80

High-performance labels for
DYMO® LabelWriter™ 550 Turbo, white

LW Labels with industrial adhesive for secure, permanent adhesion to many surfaces, such as paper, plastic, metal, wood, and glass.



- Scratch and tear-resistant plastic material
- Label printing with direct thermal printing technology
- Pre-assembled labels for quick and easy application
- Moisture resistant
- BPA-free
- Temperature resistant from -18 to 50 °C

-10%

Package contents	Dimensions (D x W) mm	For	PK	Cat. No.	Price	Now
1 roll with 800 labels	32 x 57	4.687 583	1	4.687 583	EUR 159,00	EUR 143,10
2 rolls with 450 labels	19 x 64	4.687 578	1	4.687 578	EUR 122,00	EUR 109,80
2 rolls with 350 labels	25 x 89	4.687 579	1	4.687 579	EUR 122,00	EUR 109,80
2 rolls with 850 labels	25 x 25	4.687 580	1	4.687 580	EUR 122,00	EUR 109,80

Laboratory toolbox



- Complete set
- For routine works

You can find a detailed description of the contents of the laboratory case in our shop.

-30%

Type	PK	Cat. No.	Price	Now
PROXXON 23650	1	9.306 125	EUR 278,70	EUR 195,09

Hydrogen generator Precision Hydrogen SL 100

The smallest hydrogen generator in the Precision Hydrogen SL line safely and continuously produces laboratory-quality hydrogen with a purity of 99.9995% for GC-FID. The generator is available either by manual or automatic water filling.



Small and compact



- Minimal hydrogen storage in the system
- Very low maintenance requirements
- Auto-shutdown fail-safe



Specifications

Purity:	99.9995%
Max. pressure:	6.9 bar
Required water quality:	<1.0 µS/cm
Gas connection:	1 x 1/8" Swagelok
Dimensions (W x D x H):	160 x 355 x 250 mm
Power supply:	100 ... 240 V, 50/60 Hz
Warranty:	2 years

Description	Colour	Flow rate L / min.	PK	Cat. No.	Price
With manual water fill	black	0.1	1	4.678 137	5.977,00
With manual water fill	white	0.1	1	4.678 138	5.977,00
With auto water fill	black	0.1	1	4.678 139	6.325,00
With auto water fill	white	0.1	1	4.678 140	6.325,00

LLG-Headspace-Precision Thread Vials ND18



-25%

Type	Capacity	o.d. x Height	Colour	Form	PK	Cat. No.	Price	Now
	ml	mm					EUR	EUR
(1)	10	22.5 x 46	clear	rounded bottom	100	9.003 466	43,80	32,85
(2)	20	22.5 x 75.5	clear	rounded bottom	100	4.008 270	47,90	35,93

LLG-Magnetic Universal Screw Seals ND18 for Precision Thread Vials ND18



-25%

Type	Caps	Septa	Hardness	Thickness	PK	Cat. No.	Price	Now
				mm			EUR	EUR
(3)	silver, center hole	Butyl red / PTFE grey	55° shore A	1.6	100	4.008 269	61,30	45,98
(4)	silver, center hole	Silicone blue transparent/PTFE white	45° shore A	1.3	100	6.241 111	91,60	68,70
(5)	silver, center hole	Silicone white / PTFE blue	55° shore A	1.5	100	4.008 268	116,10	87,08
(6)	silver, without hole	Butyl red / PTFE grey	55° shore A	1.6	100	6.262 513	75,00	56,25
(7)	silver, without hole	Silicone white / PTFE red UltraClean	45° shore A	1.3	100	6.267 122	90,50	67,88

Inlet Liner and o-rings for Agilent GC

Inlet Liner for Agilent 5890, 6850, 6890, 7890 and HP4890.



- 5 or 25 packs, individually packed
- Complete with instrument-appropriate o-rings and sealing rings
- Each pack is supplied with quality test results



6.236 751



6.223 553

-15%

Description	Ext. diam.	Int. diam.	Length	PK	Cat. No.	Price	Now
	mm	mm	mm			EUR	EUR
Split, with Quartz wool	6.3	4.0	78.5	5	9.003 576	134,40	114,24
Split / Splitless with Single Taper (Quartz Wool)	6.3	4.0	78.5	5	6.236 751	168,70	143,40
Split/Splitless FocusLiner®	6.3	4.0	78.5	25	6.239 332	747,10	635,04
Split/Splitless Tapered Focus Liner®	6.3	4.0	78.5	5	6.223 553	228,00	194,48
Split/Splitless FAST FocusLiner®	6.3	2.3	78.5	5	6.223 554	208,50	177,23

TFF cassettes Vivaflow® SU series



For research and development

Tangential flow filtration (TFF) cassettes for ultrafiltration and diafiltration of medium sample volumes. Specially designed for applications in research and development laboratories. High-performance membranes with a membrane area of 50 cm² ensure maximum recovery. No flushing or cleaning is required.



Individual run, 0.2 µm

For the individual run of a cassette with a volume of 100 to 500 ml.

Scope of supply:

- 2 x cassettes,
- 2 x feed tubing,
- 2 x permeate tubing,
- 2 x pressure indicator,
- 2 x retentate tubing with restrictor

Pore size µm	Dimensions (W x D x H) mm	Material Membrane	PK	Cat. No.	-16%	
					Price EUR	Now EUR
0.2	98 x 13 x 116	PES	2	4.704 918	221,00	185,64

Serial run, 0.2 µm

For the serial run of both cassettes with 500 to 1000 ml volume.

Scope of supply:

- 2 x cassettes,
- 1 x feed tubing,
- 1 x serial connector,
- 2 x permeate tubing,
- 1 x pressure indicator,
- 1 x retentate tubing with restrictor

Pore size µm	Dimensions (W x D x H) mm	Material Membrane	PK	Cat. No.	-16%	
					Price EUR	Now EUR
0.2	98 x 13 x 116	PES	2	4.704 919	221,00	185,64

Individual run, 2-1000 kDa MWCO

For the individual run of a cassette with a volume of 100 to 500 ml.

Scope of supply:

- 2 x cassettes,
- 2 x feed tubing,
- 2 x permeate tubing,
- 2 x pressure indicator,
- 2 x retentate tubing with restrictor

MWCO kDa	Dimensions (W x D x H) mm	Material Membrane	PK	Cat. No.	-16%	
					Price EUR	Now EUR
5	98 x 13 x 116	PES	2	4.704 904	221,00	185,64
10	98 x 13 x 116	PES	2	4.704 906	221,00	185,64
30	98 x 13 x 116	PES	2	4.704 910	221,00	185,64
50	98 x 13 x 116	PES	2	4.704 912	221,00	185,64
100	98 x 13 x 116	PES	2	4.704 914	221,00	185,64
300	98 x 13 x 116	PES	2	4.704 916	221,00	185,64
1000	98 x 13 x 116	PES	2	4.704 920	221,00	185,64
2	98 x 13 x 116	RC	2	4.704 922	221,00	185,64
5	98 x 13 x 116	RC	2	4.704 924	221,00	185,64
10	98 x 13 x 116	RC	2	4.704 926	221,00	185,64
30	98 x 13 x 116	RC	2	4.704 928	221,00	185,64
100	98 x 13 x 116	RC	2	4.704 930	221,00	185,64

Serial run, 2-1000 kDa MWCO

For the serial run of both cassettes with 500 to 1000 ml volume.


Scope of supply:

- 2 x cassettes,
- 1 x feed tubing,
- 1 x serial connector,
- 2 x permeate tubing,
- 1 x pressure indicator,
- 1 x retentate tubing with restrictor

MWCO kDa	Dimensions (W x D x H) mm	Material Membrane	PK	Cat. No.	-16%	
					Price EUR	Now EUR
5	98 x 13 x 116	PES	2	4.704 905	221,00	185,64
10	98 x 13 x 116	PES	2	4.704 907	221,00	185,64
30	98 x 13 x 116	PES	2	4.704 909	221,00	185,64
50	98 x 13 x 116	PES	2	4.704 911	221,00	185,64
100	98 x 13 x 116	PES	2	4.704 913	221,00	185,64
300	98 x 13 x 116	PES	2	4.704 915	221,00	185,64
1000	98 x 13 x 116	PES	2	4.704 917	221,00	185,64
2	98 x 13 x 116	RC	2	4.704 921	221,00	185,64
5	98 x 13 x 116	RC	2	4.704 923	221,00	185,64
10	98 x 13 x 116	RC	2	4.704 925	221,00	185,64
30	98 x 13 x 116	RC	2	4.704 927	221,00	185,64
100	98 x 13 x 116	RC	2	4.704 929	221,00	185,64
300	98 x 13 x 116	RC	2	4.704 931	221,00	185,64



LLG-Erlenmeyer flasks with standard ground joint, borosilicate glass 3.3

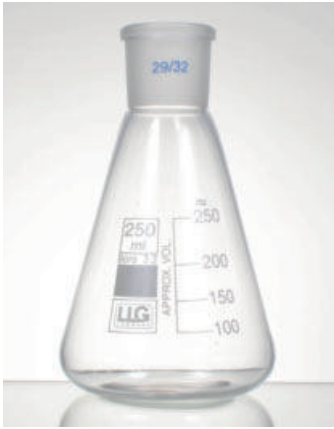

Ideal for mixing liquids. With standard ground joint and white graduation. Acc. to ISO 4797.

-25%

Capacity	Ground size	Height	PK	Cat. No.	Price	Now
ml	NS	mm			EUR	EUR
50	14/23	85	2	4.686 106	14,80	11,10
50	19/26	85	2	4.686 107	15,30	11,48
50	29/32	85	2	4.686 108	16,00	12,00
100	14/23	100	2	4.686 109	15,80	11,85
100	19/26	100	2	4.686 110	17,00	12,75
100	29/32	100	2	4.686 111	16,20	12,15
250	19/26	140	2	4.686 112	21,00	16,43
250	24/29	140	2	4.686 113	22,50	16,88
250	29/32	140	2	4.686 114	17,60	13,20
300	29/32	156	2	4.686 115	20,30	15,23
500	29/32	175	2	4.686 116	23,00	17,25
1000	29/32	220	1	4.686 117	21,20	15,90
2000	29/32	270	1	4.686 118	45,70	34,28

LLG-Erlenmeyer flasks, with a screw cap, borosilicate glass 3.3




Erlenmeyer flasks made of borosilicate glass 3.3, screw cap with PTFE liner.

- White graduation and labelling field
- GL thread

-25%

Capacity	Thread	PK	Cat. No.	Price	Now
ml	GL			EUR	EUR
100	32	2	4.686 198	30,60	22,95
250	32	2	4.686 199	40,80	30,60
500	32	2	4.686 200	46,20	34,65
1000	32	1	4.686 201	40,70	30,53

LLG-Crystallising dishes without and with spout, borosilicate glass

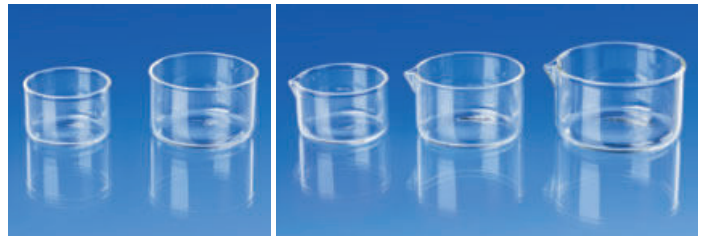

The crystallising dishes have a flat base, are made of borosilicate glass, and are characterised by high temperature and chemical resistance. Complies with DIN 12337 and DIN 12338 (with spout). Autoclavable.

-25%

Nominal capacity	Dimensions (dia. x H)	PK	Cat. No.	Price	Now
ml	mm			EUR	EUR
20	40 x 25*	5	4.705 694	24,85	18,64
40	50 x 30*	5	4.705 695	25,20	18,90
60	60 x 35*	5	4.705 696	29,85	22,39
100	70 x 40*	5	4.705 697	37,20	27,90
150	80 x 45*	1	4.705 698	15,77	11,83
300	100 x 45*	1	4.705 699	16,00	12,74
500	125 x 65*	1	4.705 700	18,60	13,95
900	150 x 75*	1	4.705 701	24,04	18,71
2000	200 x 90*	1	4.705 702	40,00	30,00
3500	230 x 100*	1	4.705 703	47,85	35,89
20	40 x 25	5	4.705 704	32,80	24,60
40	50 x 30	5	4.705 705	33,90	25,43
60	60 x 35	5	4.705 706	40,35	30,26
100	70 x 40	5	4.705 707	46,25	34,69
150	80 x 45	1	4.705 708	17,20	12,90
300	100 x 45	1	4.705 709	19,35	14,51
500	125 x 65	1	4.705 710	22,04	16,53
900	150 x 75	1	4.705 711	27,85	20,88
2000	200 x 90	1	4.705 712	43,30	32,48
3500	230 x 100	1	4.705 713	51,30	38,48

* without spout

LLG-Separating funnel, conical, borosilicate glass 3.3



Separating funnel with PTFE stopcock.

- DIN ISO 4800
- With standard ground joint and stopper

-25%

Nominal capacity	Bore	Ground size	PK	Cat. No.	Price	Now
ml	mm	NS			EUR	EUR
50	2.5	19/26	1	4.686 257	41,50	31,13
100	2.5	19/26	1	4.686 258	42,00	31,50
250	4.0	29/32	1	4.686 259	48,80	36,60
500	4.0	29/32	1	4.686 260	51,80	38,85
1000	6.0	29/32	1	4.686 261	73,00	55,43
2000	6.0	29/32	1	4.686 262	89,00	66,75



LLG-Beakers, borosilicate glass



New



Low form

LLG-Beakers are made of borosilicate glass and are characterised by high temperature and chemical resistance. The beakers are graduated and the spout facilitates pouring. Complies with ISO 3819. Autoclavable.

Nominal capacity ml	PK	Cat. No.	Price	
			EUR	Now
5	10	4.705 680	37,60	28,20
10	10	4.705 681	40,55	30,41
25	10	4.705 682	40,35	30,26
50	10	4.705 683	34,00	25,50
100	10	4.705 684	28,90	21,68
150	10	4.705 685	31,90	23,93
250	10	4.705 686	36,85	27,64
400	8	4.705 687	31,64	23,73

Tall form

LLG-Beakers are made of borosilicate glass and are characterised by high temperature and chemical resistance. The beakers are graduated and the spout facilitates pouring. Complies with ISO 3819. Autoclavable.

Nominal capacity ml	PK	Cat. No.	Price	
			EUR	Now
25	10	4.705 688	40,35	30,26
50	10	4.705 689	29,90	22,43
100	10	4.705 690	31,35	23,51
150	10	4.705 691	35,40	26,55
250	10	4.705 692	37,45	28,09
400	8	4.705 693	34,56	25,92

LLG-Volumetric flasks, borosilicate glass 3.3, class A



Conformity certified with batch ID.

- DIN ISO 1042
- With standard ground joint and PE stopper
- Blue ring mark and inscription

-20%

Capacity	Tolerance	Ground size	PK	Cat. No.	Price	Now
ml	± ml	NS			EUR	EUR
5	0.040	10/19	2	4.686 232	21,80	17,44
10	0.040	10/19	2	4.686 233	21,20	16,96
20	0.040	10/19	2	4.686 234	22,00	17,60
25	0.040	10/19	2	4.686 235	22,10	17,68
25	0.060	12/21	2	4.686 236	24,20	19,36
50	0.060	12/21	2	4.686 238	24,70	19,76
50	0.100	14/23	2	4.686 237	27,60	22,08
100	0.100	12/21	2	4.686 239	30,00	24,00
100	0.100	14/23	2	4.686 240	28,00	22,40
200	0.150	14/23	2	4.686 241	35,40	28,32
250	0.150	14/23	2	4.686 242	35,90	28,72
500	0.250	19/26	2	4.686 243	47,60	38,08
1000	0.400	24/29	1	4.686 244	36,00	28,80
2000	0.600	29/32	1	4.686 245	50,40	40,32

LLG-Volumetric flasks, amber glass, borosilicate glass 3.3, class A



Conformity certified with batch ID.

- DIN ISO 1042
- With standard ground joint and PE stopper
- White ring mark and inscription

-20%

Capacity	Tolerance	Ground size	PK	Cat. No.	Price	Now
ml	± ml	NS			EUR	EUR
5	0.040	10/19	2	4.686 246	25,50	20,40
10	0.040	10/19	2	4.686 247	25,50	20,40
20	0.040	10/19	2	4.686 248	27,30	21,84
25	0.040	10/19	2	4.686 249	27,30	21,84
50	0.100	14/23	2	4.686 250	35,90	28,72
100	0.100	14/23	2	4.686 251	40,70	32,56
200	0.150	14/23	2	4.686 252	54,00	43,20
250	0.150	14/23	2	4.686 253	54,00	43,20
500	0.250	19/26	2	4.686 254	90,60	72,48
1000	0.400	24/29	1	4.686 255	70,10	56,08
2000	0.600	29/32	1	4.686 256	92,20	73,76

Core drill, stainless steel V4A




The core sampler can be used to sample bulk materials which, due to their particle shape, are easily jammed or stuck during sampling. Compared to conventional all-layer samplers for bulk solids, the two-part core sampler has no gaps into which the medium can tilt during sampling. This enables professional sampling of a wide variety of powders and granulates through several layers, e.g. glass beads or metal powder. Depending on the size, the stainless steel sampler can be used for a wide variety of containers, such as big bags or small containers. The bulk material sampler takes a representative core sample and is ideal for use in various areas of laboratory and industry.

Scope of delivery: Core drill (consisting of drill rod and drill tube), fixing clip

-15%

Nominal capacity ml	External (Ø x L) mm	PK	Cat. No.	Price	
				EUR	Now EUR
15	15 x 200	1	4.680 865	543,60	462,06
110	25 x 400	1	4.680 866	591,25	502,56
230	25 x 800	1	4.680 867	641,35	545,15

Sample bags SteriBag blue, PE, sterile

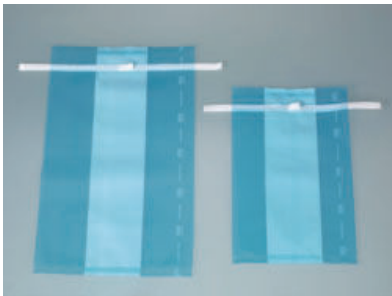

For use in the food, animal feed and pharmaceutical industries. To prevent the danger of foreign matter in production, the sample bags and the tear-off closure are coloured blue.

- Liquid-tight
- Free of RNases, DNases and pyrogens
- With write-on panel

-15%

Nominal capacity ml	Width mm	Length mm	PK	Cat. No.	Price	
					EUR	Now EUR
650	140	229	500	4.665 341	260,40	221,34
1650	178	305	250	4.665 342	189,20	160,82

Disposable tweezers, PS



For precise laboratory work.

- Serrated handles
- Cleanroom manufactured (cleanroom class 7)
- Food-safe

-15%

Form	Length mm	Sterile	PK	Cat. No.	Price	
					EUR	Now EUR
Pointed / angled: fine, smooth, curved gripping tip	130	+	100	4.670 759	60,90	51,77
Pointed: straight, inside, serrated tip	130	+	100	4.670 761	60,90	51,77
Wide tip: smooth and blunt tip	130	+	100	4.670 763	60,90	51,77

Sample bags Sani-Stick and Sani-Sponge, with cellulose sponge



- High quality
- Made in Canada



For taking surface samples.

- With writing area
- Rigid handle (Sani-Stick)
- Integrated secure closure system with 2 round wires (Sani-Sponge)
- Quick release system for the sponge
- Integrated secure closure system with 2 round wires
- Sterile
- Contaminant-free
- Waterproof and airtight
- RNase, DNase and pyrogen-free

-35%

Nominal capacity ml	Dimensions (W x H) mm	Medium	PK	Cat. No.	Price	
					EUR	Now EUR
1200	152 x 267*	Lethen broth	10	6.522 307	38,40	24,96
1200	152 x 267*	Dey-Engley neutralising broth	10	6.522 308	38,40	24,96
1200	152 x 267*	Buffered peptone water	10	6.522 309	38,40	24,96
1200	152 x 267*	Neutralising buffer	10	4.701 832	38,40	24,96
2100	191 x 292**	Buffered peptone water	100	6.522 404	320,80	208,52
2100	191 x 292**	Lethen broth	100	6.522 393	321,80	209,17
2100	191 x 292**	Neutralising buffer	100	6.522 405	342,90	203,39
2100	191 x 292**	Dey-Engley neutralising broth	100	6.522 406	348,30	206,90

* Sani-Stick, **Sani-Sponge

Ultrasonic baths SONOREX smart ST



- ECO mode
- Touchscreen
- Numerous functions



These all-round devices with intuitive touchscreen operation offer detailed setting options for every parameter, precise process monitoring and logging and program memory for reliably reproducible results.

- With warning and switch-off function
- With dry-running protection
- Adjustable from 10 to 100%
- Process duration is accurate to the second, with an automatic switch-off
- ECO mode to reduce energy consumption
- Individual programmes can be saved
- Choice of different languages
- Process documentation via DST 01 docking station (optional) with USB and Ethernet



Type	Nominal capacity l	Plug type	PK	Cat. No.	Price EUR	Now EUR
smart ST 102 H	3.0	EU	1	4.709 932	1.458,00	1.239,30
smart ST 510 H	9.7	EU	1	4.709 937	1.892,00	1.608,20
smart ST 1028 H	28.0	EU	1	4.709 940	3.397,00	2.887,45

-15%

Suspension baskets for Sonorex ultrasonic baths



Stainless steel. Optimal ultrasonic wave transmission. Items to be cleaned should not be placed on the bottom of the tank.

Type	For bath type	Dimensions (W x D x H) mm	PK	Cat. No.	Price EUR	Now EUR
K 3 C	ST 102 H	200 x 110 x 40	1	9.877 633	74,00	62,90
K 10	ST 510 H	250 x 195 x 50	1	9.877 697	209,00	177,65
K 28	ST 1028 H	455 x 245 x 50	1	9.877 698	301,00	255,85

-15%

Lids for Sonorex ultrasonic baths



Stainless steel. For covering bath tanks, as outlined below.

Type	For bath type	PK	Cat. No.	Price EUR	Now EUR
D 100	ST 102 H	1	9.877 603	48,00	40,80
D 510	ST 510 H	1	9.877 610	69,00	58,65
D 1028	ST1028 H	1	9.877 607	92,00	78,20

-15%

Docking station DST 01 for ultrasonic baths SONOREX smart ST



Simple transfer of the process logs to other storage media. USB-A, USB-B and Ethernet connection.

Type	For	PK	Cat. No.	Price EUR	Now EUR
DST 01	SONOREX smart ST	1	6.328 138	234,00	198,90

-15%



Solvent pump hand operated



For contamination-free removal of organic solvents and flavouring agents. Can be completely closed off with two ball valves so that no dangerous vapours can escape after dispensing. Electrostatic charge can be dissipated through the accessory antistatic set (please order separately).

- Medium-contacting parts are made of stainless steel (1.4301) and PTFE
- For containers up to 60 litres
- Suitable for containers with R 2" thread
- The solvent pump for tinplate canisters has a connector thread for pull-out spouts

-15%

Description	Immersion depth mm	PK	Cat. No.	Price EUR	Now EUR
Hand pump	600	1	9.001 349	508,60	432,31
Hand pump for tinplate canisters	600	1	6.237 176	548,60	466,31

Space-saving jerrycans, HDPE, electrically conductive



Black. For use in explosion-protected areas. Electrostatic charge can be dissipated through the accessory antistatic set (please order separately).

- Antistatic
- Surface resistance <math>< 10^5 \text{ Ohm}</math>
- With or without threaded connector 3/4"
- Space-saving due to its narrow width
- Electrically conductive stopcock StopCock PA (available as accessory)

-15%

Nominal capacity ml	Description	Width mm	PK	Cat. No.	Price EUR	Now EUR
5000	with threaded connector	65	1	4.665 332	58,05	49,34
5000	without threaded connector	65	1	4.665 330	55,55	47,22
10000	with threaded connector	125	1	4.665 333	76,30	64,86
10000	without threaded connector	125	1	4.665 331	73,85	62,77

Solvent pump foot operated



For filling off high-purity liquids such as solvents. Due to the barrel screw joint and the stopcock, the container and the pump can be hermetically sealed. Electrostatic charge can be dissipated through the accessory antistatic set (please order separately).

- Medium-contacting parts made of stainless steel (1.4301) and PTFE
- For barrels up to 220 litres, the immersion tube can be steplessly adjusted to the barrel depth
- Suitable for steel barrels with R 2" thread

-15%

Description	Immersion depth mm	Flow rate L / min.	PK	Cat. No.	Price EUR	Now EUR
Foot pump with rigid angled tube	950	30	1	9.001 134	556,00	473,37
Foot pump with flexible tubing	950	30	1	6.236 800	746,40	634,44

Tubing clamps stop-it, Metall



Tubing clamps can regulate or stop the flow through of tubings that carry fluids or gases.

-20%

To fit tubing mm	PK	Cat. No.	Price EUR	Now EUR
0.5 ... 10	5	9.303 787	22,00	17,60
0.8 ... 15	5	9.303 788	35,25	28,20
1.1 ... 20	5	9.303 789	38,25	30,60
2.5 ... 30	2	9.303 790	23,40	18,72

Anti-static set



When dispensing combustible/explosive liquids pump, both the dispensing and filling drum involved in the process must be sufficiently earthed, to prevent ignition or explosion through electrostatic discharges. The antistatic set includes three colour-coded connecting cables with clamps, supplied complete in a plastic case.

-15%

Type	PK	Cat. No.	Price EUR	Now EUR
Antistatic set	1	9.001 346	57,00	48,45

Single channel microliter pipettes, Transferpette® S, variable



Volume ranges from 0.1 µl to 10000 µl.

- Volume-change protection
- Easy Calibration technology: Calibration without tools
- Completely autoclavable at 121 °C
- Colour code on volume adjustment wheel, shaft and volume-change protection
- DE-M marking

Scope of supply: Transferpette® S type adjustable volume, with performance certificate, shelf/rack mount, labelling foil, silicone grease




-25%

Capacity	Accuracy max. vol.	Precision max. vol.	Tip	PK	Cat. No.	Price	Now
µl	(± R%)	(≤ CV%)	µl			EUR	EUR
0.1 ... 1	2	1.2	0.1 ... 20	1	9.280 140	270,50	202,88
0.1 ... 2.5	1.4	0.7	0.5 ... 20	1	9.280 141	270,50	202,88
0.5 ... 10	1.0	0.5	0.5 ... 20	1	9.280 142	270,50	202,88
2 ... 20	0.8	0.4	2 ... 200	1	9.280 143	270,50	202,88
5 ... 50	0.8	0.3	2 ... 200	1	9.280 144	270,50	202,88
10 ... 100	0.6	0.2	2 ... 200	1	9.280 145	270,50	202,88
20 ... 200	0.6	0.2	2 ... 200	1	9.280 146	270,50	202,88
100 ... 1000	0.6	0.2	50 ... 1000	1	9.280 147	270,50	202,88
500 ... 5000	0.6	0.2	500 ... 5000	1	9.280 148	270,50	202,88
1000 ... 10000	0.6	0.2	1000 ... 10000	1	9.280 149	270,50	202,88

Pipette tips, bulk, in reclosable bags, non-sterile

All tips and filter tips are produced under supervised state-of-the-art Cleanroom conditions and automatically shrink-wrapped in reclosable bags and packaged in cardboard boxes. The batch number is printed on every bag.



-25%

Colour	Capacity	Package contents	PK	Cat. No.	Price	Now
	µl				EUR	EUR
natural	0.1 - 20	2 bags of 1000	2000	9.409 669	76,80	57,60
natural	0.5 - 20	2 bags of 1000	2000	9.409 670	71,60	53,70
yellow	2 - 200	1 bag of 1000	1000	9.409 672	23,80	17,85
natural	5 - 300	1 bag of 1000	1000	9.409 673	28,60	21,45
blue	50 - 1000	2 bags of 500	1000	9.409 674	27,00	20,25
natural	500 - 5000	1 bag 200	200	9.409 223	22,30	16,73
natural	1000 - 10000	2 bags of 100	200	9.409 191	44,80	31,35

Pipettors, variable, repeating, Stepper™ 416



Highly comfortable pipette, intended for reliable repeat dispensing from 10 to 5000 µl. Unique trigger action mechanism eliminates thumb fatigue. Wide selection between 53 different volumes; up to 73 doses per filling. Two-year warranty.

- Setting knobs bear a clear indication of volumes and number of aliquots
- Three positive displacement syringes, colour-coded
- Self-locking mechanism



-20%

Description	PK	Cat. No.	Price	Now
			EUR	EUR
Stepper™ 416 supplied with colour-coded adjustment knobs, adapter, samples of Eco-step syringes	1	4.678 370	342,00	273,60

Syringe tips, Eco-step for Stepper™ 416



The disposable PE/PP syringes can be quickly and easily inserted into the Stepper™ 416. Three sizes of syringes cover the entire volume range from 10 to 5000 µl.

Bioproof: Sterilized syringes are DNase-, RNase- and pyrogen-free certified.

-20%

Type	Capacity	Capacity	PK	Cat. No.	Price	Now
	µl				EUR	EUR
Non-sterile	10 - 100	0.75	100	9.411 509	106,50	85,20
Non-sterile	50 - 500	3.75	100	9.411 511	108,60	86,88
Non-sterile	500 - 5000	37.5	100	9.411 513	143,20	114,56
Sterile	10 - 100	0.75	50	9.411 578	123,40	98,72
Sterile	50 - 500	3.75	50	9.411 579	126,40	101,12
Sterile	500 - 5000	37.5	50	9.411 580	168,20	134,56

Ultra-low temperature upright freezers ULT series, up to -86 °C

Compact ultra-low temperature freezer for temporary to long-term cold storage of biological samples.

- Temperature logger with USB port
- Battery backup for 48 h
- Digital controller with display
- High/low-temperature alarm
- Audible and visual alarm
- Contact for remote alarm
- Porthole for external probe and CO₂ backup
- Eco-friendly, HCFC-free Nature R refrigerant

Type designation -PLUS: With extended exchange warranty. In warranty cases which cannot be solved quickly on-site, the client receives a new device.



- Reliable and powerful
- Digital controller
- Audible and visual alarm



Specifications

Temperature range: -86 ... -60 °C
 Temperature probes: 1 x PT 1000
 Power supply: 230 V, 50 Hz

Type	Capacity Litres	External dimensions (W x D x H) mm	Internal dimensions (W x D x H) mm	Weight kg	PK	Cat. No.	Price	
							EUR	EUR
ULT U35	37	630 x 675 x 650	439 x 271 x 433	59	1	6.322 824	5.562,00	5.228,28
ULT U35-PLUS	37	630 x 675 x 650	439 x 271 x 433	59	1	6.490 712	8.174,00	7.683,56
ULT U100	93	595 x 630 x 825	430 x 425 x 625	60	1	4.672 408	5.140,00	4.831,60
ULT U100-PLUS	93	595 x 630 x 825	430 x 425 x 625	60	1	4.672 428	7.199,00	6.767,06

-6%

Ultra-low temperature chest freezers ULT series, up to -86 °C

Ultra-low temperature freezer for temporary to long-term cold storage of biological samples. Ideal for daily use in laboratories and scientific facilities.

- Digital controller with display
- Audible and visual alarm
- High/low-temperature alarm
- Contact for remote alarm
- Battery backup for 48 h
- Porthole (Ø12 mm) for external probe and CO₂ backup
- Integrated lock
- With 4 castors
- Eco-friendly, HCFC-free Nature R refrigerant

Specifications

Internal humidity: -86 ... -60 °C
 Temperature probes: 1 x PT 1000
 Power supply: 230 V, 50 Hz



Type	Capacity Litres	External dimensions (W x D x H) mm	Internal dimensions (W x D x H) mm	Weight kg	PK	Cat. No.	Price	
							EUR	EUR
ULT C75	71	555 x 630 x 630	387 x 387 x 465	45	1	4.672 404	4.206,00	3.953,64

-6%

Digital water baths



- Including lid
- Color TFT display

- Color TFT display with control panel
- Calibration offset feature
- 5 user programmable pre-sets (temperature and duration)
- 5 languages (English, German, French, Spanish and Chinese)
- Integrated independent timer
- Rear-mounted drain (10, 20 and 28 litres)

Scope of supply: Digital water bath, incl. lid



Specifications

Temperature range:	Ambient +5 °C ... 100 °C
Temperature uniformity:	±0.2 °C
Temperature stability:	±0.1 °C
Power supply:	240 V, 50 Hz

Type	Capacity of the bath litres	PK	Cat. No.	Price EUR
WBE02A12E	2	1	6.274 985	584,30
WBE05A12E	5	1	6.274 986	704,70
WBE10A12E	10	1	6.274 987	840,60
WBE20A12E	20	1	6.274 988	1.013,40
WBE28A12E	28	1	6.274 989	1.066,50

Heating bath circulator ECO ET Gold, with polycarbonate bath tank



Thermostatic bath circulator with the latest microprocessor technology. With flow rate switch on the control head for individual setting of the internal and external circulation, even during operation.

- User-friendly menu navigation in plain language
- Safety class III for operation with flammable and non-flammable liquids
- Pump with 6 adjustable performance levels
- Cooling coil as standard
- USB interface as standard
- Coloured TFT display for simultaneous indication of actual and set values and graphic illustration of the temperature profile
- Stainless steel pump connectors (M16x1 thread)

-10%

Type	Capacity litres	PK	Cat. No.	Price EUR	Now EUR
ET 6 G	5.0 ... 6.0	1	6.319 701	2.900,00	2.610,00
ET 12 G	9.5 ... 12.0	1	6.242 985	3.270,00	2.943,00
ET 15 G	13.5 ... 15.0	1	6.259 775	3.290,00	2.961,00
ET 20 G	15.0 ... 20.0	1	6.522 851	3.290,00	2.961,00

Refrigerated circulators CORIO™ CD series



- Choose your color!
- Environmentally friendly
- Natural refrigerant



Refrigerated circulators are suitable for internal and external standard temperature applications as well as routine work in laboratories and industry.

- Bright, white, easy-to-read display
- Easy pump switching between internal and external circulation
- External pump connections (M16x1)
- USB connection
- Space-saving cooling coil design yields more usable space in the bath tank
- Stainless steel bath tank including bath lid and drain tap
- Removable ventilation grid
- Refrigeration unit without lateral ventilation openings
- 2 hose olives each suitable for hose inner diameter 8 and 12 mm included
- Class III (FL) acc. to DIN 12876-1



Type	Capacity litres	PK	Cat. No.	Price EUR
CD-310F	3 ... 4	1	4.685 626	4.446,00
CD-450F	3 ... 4	1	4.685 628	4.931,00
CD-800F	5 ... 7.5	1	4.692 234	6.501,00
CD-1200F	5 ... 7.5	1	4.692 235	7.756,00
CD-310F, green foiled	3 ... 4	1	4.710 157	4.446,00
CD-450F, green foiled	3 ... 4	1	4.710 158	4.931,00
CD-800F, green foiled	5 ... 7.5	1	4.710 159	6.501,00
CD-1200F, green foiled	5 ... 7.5	1	4.710 160	7.756,00

LLG-Disposable Protective Suits, PP



White PP non-woven 30 g/m², with hood and zipper, elastic band on the hood and the wrists and ankles, latex-free

-40%

Size	PK	Cat. No.	Price	Now
			EUR	EUR
L	10	6.282 791	31,90	19,14
XL	10	6.282 792	32,30	19,38
XXL	10	6.282 793	33,40	20,04

Skin Protection Cream
LINDESA® K PROFESSIONAL
with Beeswax and Chamomile



Quickly absorbed. The cream strengthens the defensive functions of the skin, preventing skin damage from external pollution and soothes irritation. Smooths and cleans without leaving a residue.

-15%

Capacity	PK	Cat. No.	Price	Now
			EUR	EUR
100 ml	10	6.317 296	42,90	35,70

Clip hood



- Non-woven fabric
- Soft quality with a double-sheathed cotton elastic band
- Gathered
- Food-safe
- Packaging 10 x 100 pieces

-35%

Colour	Size	Diam.	PK	Cat. No.	Price	Now
		mm			EUR	EUR
white	medium	520	1000	4.665 805	37,90	24,64
blue	medium	520	1000	6.286 653	45,50	29,58
white	big	550	1000	7.500 013	50,60	32,89

Disposable Gloves Format, Nitrile

EN ISO 374-1 Type C EN ISO 374-5 EN 420



Non-sterile, powder-free, hypoallergenic, with beaded cuff and microroughened surface.

EN 455 T 1-3, CE. Type examination test acc. EN 374.

Cat. III Low Chemical resistance.

Supplied in dispenser box containing 100 gloves.

According to EN ISO 374-1:2016/Type C, EN ISO 374-5:2016, EN 420

-20%

Size	PK	Cat. No.	Price	Now
			EUR	EUR
XS (5 to 6)	100	9.005 344	17,10	13,68
S (6 to 7)	100	9.005 345	17,10	13,68
M (7 to 8)	100	9.005 346	17,10	13,68
L (8 to 9)	100	9.005 347	17,10	13,68
XL (9 to 10)	100	9.005 348	17,10	13,68

pH meter
SevenDirect™ SD20



SD20 Stirrer-Kit

The pH meter SD20 is a robust benchtop device for measuring the pH value.

- Large 7" touch screen with intuitive user interface
- Electrode arm EasyPlace™ places the sensor precisely
- Intelligent Sensor Management (ISM®) ensures the correct use of the connected sensor
- Calibration with up to 5 calibration points
- GLP compliant

Scope of supply: pH meter, electrode arm EasyPlace™, protective cover, power supply, get-started-guide

SD20 kit: pH electrode InLab® Expert Pro-ISM with robust PEEK shaft and integrated temperature sensor.

Scope of delivery: like pH meter SevenDirect™ SD20 + pH electrode InLab® Expert Pro-ISM, buffer pH 4.01, 7.00 and 9.21 or 10.01

SD20 Stirrer kit: EasyMix's magnetic stirrer - homogenises the sample and thus ensures reliable measurement results

Scope of delivery: like pH meter SevenDirect™ SD20-Kit + magnetic stirrer EasyMix™

Specifications

pH range: -2.000 ... 20.000
Accuracy: ±0.002
mV range: -2000.0 ... 2000.0 mV
Temperature range: -30 ... 130 °C
IP code: IP54

-15%

Type	PK	Cat. No.	Price	Now
			EUR	EUR
SD20	1	4.684 932	1.120,00	952,00
SD20-Kit	1	4.684 936	1.480,00	1.258,00
SD20 Stirrer-Kit	1	4.684 937	1.740,00	1.479,00

LLG-Universal Indicator strips
"Premium",
in a vial with snap lid



The LLG pH indicator strips offer convenient handling for every laboratory. The snap-on lid attached to the can can be easily opened and closed with one hand.

-20%

Range	Package contents	PK	Cat. No.	Price	Now
pH				EUR	EUR
0 ... 14	100 strips per vial with snap lid	100	9.129 808	14,30	11,44

Multiparameter meters
MultiLine® 3510 IDS



Professional digital multiparameter meters for mobile measurement. Sequential multi-parameter measurement. All WTW IDS pH, ORP, dissolved oxygen sensors, conductivity cells and turbidity sensors can be connected to the universal channel with a cable or a wireless module. Data transfer to PC with MultiLab® Importer. It has a Mini USB-B interface and a black/white display.



Multi 3510 IDS: Single meter in a carrying case with buffer 4, 7, KCl 3 mol/l, conductivity standard, batteries, USB cable

Multi 3510 SET 1: Meter in a carrying case with pH electrode SenTix® 940, buffer 4, 7, KCl 3 mol/l, conductivity standard, batteries, USB cable

Multi 3510 SET 3: Meter in a carrying case with conductivity sensor TetraCon® 925, conductivity standard, batteries, USB cable

Multi 3510 IDS SET 4: Meter in a carrying case with optical oxygen sensor FDO® 925, batteries, USB cable

Specifications

Memory: manual: 500 data records
automatic: 4500 data records
Dimensions (W x D x H): approx. 180 x 80 x 55 mm
Weight: 400 g
Power supply: 4 alkaline batteries, USB
IP code: IP 67

-5%

Type	Description	PK	Cat. No.	Price	Now
				EUR	EUR
Multi 3510	1 channel, meter only	1	6.282 979	1.012,00	961,40
Multi 3510 SET 1	1 channel, SenTix® 940	1	6.282 978	1.300,00	1.170,00
Multi 3510 SET 3	1 channel, TetraCon® 925	1	6.283 710	1.615,00	1.453,50
Multi 3510 SET 4	1 channel, with FDO® 925	1	6.270 393	1.972,00	1.774,80

pH tester Pocket Tester SD10 pH



Pocket Tester with waterproof housing for measuring pH, mV, and temperature.

- Up to 3 calibration points
- With stability indicator, alarm for limits, auto-hold, and auto-off function
- Battery operation (4 x AAA batteries)


Specifications

pH measuring range: 0.00 ... 14.00
Resolution: 0.01
Accuracy: ±0.01 (±1 digit)
mV measuring range: -1000 ... 1000 mV
Resolution: 1 mV
Accuracy: ±0.2% FS
Protection class: IP 67

-5%

Type	PK	Cat. No.	Price	Now
			EUR	EUR
SD10 pH	1	4.694 724	136,00	129,20

Safety Storage Cabinets V-Move 90

 Safe and proper storage

asecos



The space-saving vertical drawer Safety storage cabinets provide an overview and simple access to the stored containers. Safe and approved storage of flammable hazardous substances in working areas.

- Space-saving vertical drawer
- Electronic opening and closing
- Standard serial closing after approx. 60 seconds with visual and acoustic signals for drawer closure
- Lockable with cylinder lock (integration in an existing locking system possible) and locking state indicator (red/green)
- Adjusting aids to compensate for uneven floor
- Integrated air ducts ready for connection (DN 75) to an exhaust system


Scope of supply: Cabinet with 5 x shelves (1-l bottles), 1 x perforated insert, 1 x bottom collecting sump

Specifications

Outer dimensions (W x D x H): 450 x 863 x 1966 mm
 Internal dimensions (W x D x H): 331 x 773 x 1750 mm
 Net weight (corpus): 344 kg

Type	Colour	PK	Cat. No.	Price
V90.196.045	Light grey	1	4.662.147	EUR 4.869,00

Laboratory/Medical saddle stool

 - High seating comfort
 - Made in the EU

bimos



Laboratory/Medical saddle stool with castors

- Intuitive 3D seat dynamics
- 3-zone upholstery foam
- Seamless and crease-free upholstery (Imitation leather)
- Polished aluminium base

Type	Seat height adjustment	PK	Cat. No.	Price
Saddle stool	mm 540 - 800	1	6.521.481	EUR 308,00

Disposal Container SHARPSAFE®

 Hospidex



-15%

Nominal capacity	Dimensions (W x D x H)	Print Languages	PK	Cat. No.	Price	Now
l	mm				EUR	EUR
4	175 x 175 x 245	DE/UK/FR/IT/ES	4	4.688.125	18,40	15,64
7	175 x 175 x 380	DE/UK/FR/IT/ES	4	4.688.126	25,40	21,59
24	230 x 450 x 335	UK	1	4.688.130	18,00	15,30

Waste disposal cans



 ISO THERM

Duran® glass.
 Efficient, secure intermediate storage of aggressive laboratory objects. Can be used almost anywhere. Resistant to most acids and alkalis. Very stable. Orange lacquer coating and hazard signs.

-12%

Capacity	PK	Cat. No.	Price	Now
Litres			EUR	EUR
4	1	9.032.848	567,25	499,18
8	1	9.032.850	611,65	538,25
15	1	9.032.852	738,74	650,09

Bunsen burners with needle valve



DIN 30665. Air regulation.

-15%

Type	Height	Weight	PK	Cat. No.	Price	Now
	mm	g			EUR	EUR
Natural gas	155	220	1	9.018 361	38,20	32,47
Propane gas	155	220	1	9.018 362	38,20	32,47

Triangle



Zinc-plated steel wire with pipeclay tubes.

-25%

Pipeclay tube Length	Weight	PK	Cat. No.	Price	Now
mm	g			EUR	EUR
40	16	2	9.033 740	18,40	13,80
50	33	2	9.033 741	19,80	14,85
100	58	2	6.085 914	23,80	17,85

Tripod stand



Chrome-plated steel. Tripods are meant to be used in conjunction with wire gauze, triangles or a sand bath.

-25%

Diam.	Description	PK	Cat. No.	Price	Now
mm				EUR	EUR
125	Total height 200 mm	1	6.242 704	24,44	18,33

Safety Bunsen Burner, schuett phoenix II



Ideal for safety cabinets

schuett-biotec.de



phoenix II eco



phoenix II standard

For sterilising, heating, flame sterilising. For use in every microbiological laboratory or safety cabinets.

- Controlled burning time 1 sec to 120 min (selectable)
- Automatic safety shut-off (selectable)
- Overheating protection/burner control by sensors

Suitable for use with natural gas (central gas) or butane/propane gas (gas cartridges). Integrated stands for tilting right or left. Safety standard acc. to DIN 30665 part 1, DIN-DVGW

Schuett Phoenix II eco: (with LED control lamp and foot-switch) Start flame by foot-switch or button (On/Off). Best suited for use in microbiological safety cabinets. Best price-to-performance ratio.

Schuett Phoenix II standard: (brilliant colour display, selection of native language, sensor and foot-switch) Start/Stop flame by activating sensor 1x or 2x, use foot switch or press button by hand. Continuous display of timer.

Schuett Phoenix II accu: (brilliant colour display, selection of native language, sensor and built-in extra heavy duty power cells) Start/stop flame by activating sensor 1x or 2x, use foot-switch or press button by hand. Continuous display of timer and battery power. Operates for up to 30 hours, intermittent use. Complete with battery charger for 3-hour recharging. Ideal for mobile usage.

Power supply: 100 - 240 V, 50/60 Hz

-10%

Type	PK	Cat. No.	Price	Now
			EUR	EUR
schuett phoenix II eco*	1	9.018 760	539,40	485,46
schuett phoenix II standard*	1	9.018 761	703,90	633,51
schuett phoenix II accu	1	9.018 762	809,60	728,64

*incl. foot switch, stainless steel

Real-time horizontal gel electrophoresis system runVIEW



Complete sets



- Versatile, self-contained system on the market for real-time horizontal gel electrophoresis
- Includes accessories for standard gel electrophoresis for size fractionation and simplified real-time gel-free DNA band extraction and purification
- Included Double-sided Combs: 2x 1-sample/2-sample preparatory; 2x 4-sample preparatory/16-sample combs; 4x 20- /28-sample multichannel compatible screening. Comb Thickness: 1mm. Extra-thick 2x 4- and 2x 6-sample 3mm preparatory combs are also included.

Specifications

runVIEW Viewing Dock

Blue Light Wavelength:	470 nm
Voltage/Resolution:	25-150 V/1 V
Current/Resolution:	300 mA/1 mA
Power:	30 W
Timer:	1 to 999 min (with alarm)
Dimensions (W x D x H):	29.3 x 22.0 x 8.0 cm
Power supply:	100-240 V, 50/60 Hz

runVIEW Gel System

Gel Dimensions (W X L):	15 x 7, 15 x 10 and 15 x 15 cm
Unit dimensions (W X D X H):	26.5 x 17.5 x 9.0 cm
Buffer volume:	500 ml

-25%

Description	PK	Cat. No.	Price	Now
			EUR	EUR
runVIEW system complete with 15 x 7 cm gel tray, 1 set of casting dams and 8 double-sided combs	1	9.584 764	1,936,10	1.452,08
runVIEW system complete with 15 x 10 cm gel tray, 1 set of casting dams and 8 double-sided combs	1	9.584 765	1,936,10	1.452,08
runVIEW system complete with 15 x 15 cm gel tray, 1 set of casting dams and 8 double-sided combs	1	7.920 135	1,936,10	1.452,08
runVIEW system complete with 15 x 7, 15 x 10 and 15 x 15 cm gel trays, 3 sets of casting dams and 8 double-sided combs	1	9.584 766	1,968,30	1.476,23
runVIEW base station and bluVIEW lid	1	9.584 767	1,643,20	1.232,40
runVIEW gel documentation hood with camera	1	9.584 768	2,618,60	1.963,95
runVIEW base station and blueVIEW lid for MS MINI system	1	6.286 851	535,40	401,55
runVIEW base station and blueVIEW lid for MS MIDI system	1	6.286 852	566,30	424,73

Semi-Dry Blotters




SD10

The devices enable transfer times of just 15 to 30 minutes for DNA, RNA and protein blotting. Suitable for all common blotting methods (Western, Southern, Northern) and gel thicknesses from 0.25 to 10 mm. Cost-effective transfers due to low buffer volume.

-25%

Type	Description	PK	Cat. No.	Price	Now
				EUR	EUR
SD10	Mini, 10 x 10 cm	1	9.584 753	827,90	628,43
SD20	Maxi, 20 x 20 cm	1	6.229 381	1,209,90	981,75

BLUE Wide Range, Protein Ladders, Prestained

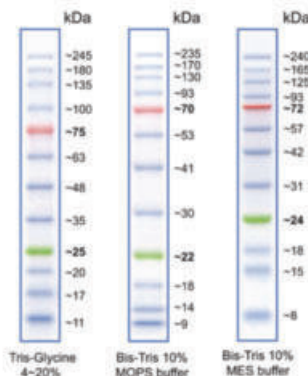

The marker is covalently bound to a blue colour chromophore to produce a ladder of evenly interspersed bands of uniform intensity.

- Easy identification in gels and blots
- Detectable from 2.5 µl
- 2 years stable at - 20 °C
- Vials of 500 µl

-25%

Size	Bands	Reference bands	PK	Cat. No.	Price	Now
					EUR	EUR
10 - 245 kDa	12	25, 75 kDa	1	4.661 311	178,50	133,88

Square Media Bottles, PET, sterile



For safe storage and transportation of cell culture media. The bottles are manufactured at aseptically sterile production halls and then sent to gamma sterilisation.

- Thick walls and crush-resistant corners
- Square shape
- Embossed volume graduations

-40%

Nominal capacity ml	Dimensions (W x D x H) mm	PK	Cat. No.	Price	Now
				EUR	EUR
125	53 x 53 x 105	40	9.073 276	149,93	89,96
250	59 x 59 x 147	45	9.073 277	191,66	115,00
500	77 x 77 x 174	21	9.073 278	106,78	64,07
1000	93 x 93 x 214	15	9.073 279	105,99	63,05

Nalgene Freezing container
Mr. Frosty, PC



With a 120 mm diameter screw cap in blue HDPE, a vial holder made of white HDPE. Foam interior. Cooling rate 1 °C/min. Tubes can be easily removed. Each aperture has a moulded number for identification. Stackable.

-50%

For tubes	Diam.	Height	No. of tubes	PK	Cat. No.	Price	Now
ml	mm	mm				EUR	EUR
1.0 ... 2.0	117	86	18	1	9.400 945	175,20	87,60
3.6	117	151	12	1	9.400 990	180,00	90,00
4.5 ... 5.0	117	151	12	1	9.400 991	180,00	90,00

LLG-Cryotubes, PP, sterile



With and without a stand-up ring. With a star shape in the screw cap, for an automated capper/decapper. Temperature resistance down to -196 °C. **Not appropriate for operations in liquid nitrogen.** Packed in 2 bags of 50 tubes.

-37%

Capacity	Ext. diam.	Height	Thread	PK	Cat. No.	Price	Now
ml	mm	mm				EUR	EUR
1.2	12.6	40.2	External	100	9.401 160	39,70	24,90
1.2	12.6	40.2	Internal	100	9.401 161	39,70	24,90
2.0	12.6	45.6	External	100	9.401 162	39,70	24,90
2.0	12.6	48.2	Internal	100	9.401 163	39,90	24,90
2.0	12.6	44.5	External*	100	9.401 164	39,70	24,90
2.0	12.6	47.0	Internal*	100	9.401 165	39,70	24,90
5.0	12.6	87.6	External	100	9.401 166	39,70	24,90
5.0	12.6	89.2	Internal*	100	9.401 167	39,70	24,90
5.0	12.6	90.3	Internal	100	9.401 168	39,70	24,90

* without stand ring

LLG-Pipette controller easy



Ergonomic and precise



The LLG-Pipette controller easily enables fast and exact pipetting with glass and plastic pipettes.

- Ergonomic and lightweight construction for constant ease of use over prolonged usage
- Unique nose cone angle for enhanced flexibility in operation e.g. in fume hoods
- Eco-friendly rechargeable NiMH batteries, offering up to 8 hours of continuous working
- Autoclavable tip cone for avoiding cross-contamination

Scope of supply: Pipette controller, manual, charger, wall-mount, desktop stand

-25%

Description	Plug type	PK	Cat. No.	Price	Now
				EUR	EUR
LLG-Pipette controller easy	EU	1	6.263 683	255,70	191,78

LLG-Serological pipettes, PS, sterile



Serological pipettes from LLG are ideally suited for sterile serological and cell culture applications.

- Also available as short pipettes (5 ml, 10 ml and 25 ml) or wide-mouth pipettes (10 ml)
- 1 ml, 5 ml, 10 ml, 25 ml and 50 ml pipettes contain a bi-directional secondary graduation scale for precise dosing
- Colour-coded ring mark for easy volume identification
- Single-packed in easy-to-open plastic/paper packaging

-20%

Volume	Grad.	Colour code	Negative graduations	PK	Cat. No.	Price	Now
ml	ml					EUR	EUR
1	1/100	yellow	0.3	500	9.380 440	71,90	57,52
2	1/50	green	0.6	500	9.380 441	83,30	66,64
5	1/10	blue	3	200	7.930 401	46,90	37,52
10	1/10	orange	3	200	6.268 240	65,80	52,64
10	1/10	orange*	3	200	9.380 442	54,50	43,60
25	2/10	red	8	150	7.930 403	71,10	56,88
50	5/10	purple	10	100	9.380 443	71,80	57,44
5	1/10	blue**	3	200	6.265 881	81,20	64,96
10	2/10	orange**	10	150	6.265 882	81,20	64,96
25	5/10	red**	9	100	6.265 883	73,30	58,64

* wide mouth, **short form

High-performance Greenough Stereo Microscope with LED, SMZ-171 Serie

Motic
MORE THAN MICROSCOPY

Versatile Stereo microscope for a wide range of biological and material science applications.

- Observation Tube Binocular - /Phototube 45°, 360° rotating, F.N. 23
- Widefield adjustable eyepieces WF10X/23 mm, incl. eyecups
- 6.7:1 Zoom ratio, WD=110 mm
- Objective magnification range: 0.75X-5X
- Main supply 100 V-240 V (CE)
- Black/White and frosted glass stage plates, and dust cover



SMZ-171-TLED

-15%

Type	Description	PK	Cat. No.	Price	Now
				EUR	EUR
SMZ-171-BLED	Binocular	1	6.264 087	1.200,00	1.095,65
SMZ-171-TLED	Trinocular	1	7.671 016	1.365,00	1.160,25

Light Microscopes Educational-Line OBE 12/13

KERN



The fully equipped all-round compound microscope for school, training and laboratories.


- Monocular (OBE 121, 131): Tube 30° inclined
- Binocular (OBE 122, OBE 132): Tube Butterfly 30° inclined, 360° rotatable
- Trinocular (OBE 124, 134): Tube Butterfly 30° inclined, 360° rotatable
- Widefield Eyepiece: WF 10x/18 mm
- Diopter adjustment at bino- and trinocular Version available (at one eyepiece tube)
- Quadruple nosepiece
- Coaxial pre-and fine focusing
- ABBE 1.25 condenser focussed with aperture diaphragm
- Dimmable 3 W LED illumination
- Storage compartment on the rear side
- USB connection (only as power source)
- Dust Cover, eyepiece rubber caps and manual instruction included
- Achromatic objective

Total dimension (W x D x H): 360 x 150 x 320 mm
Weight: 4.6 kg
Power supply: 230 V/50 Hz, external power bank via USB

-25%

Type	Description	PK	Cat. No.	Price	Now
				EUR	EUR
OBE 121	Monocular, 4x, 10x, 40x	1	4.670 979	490,00	367,50
OBE 122	Binocular, 4x, 10x, 40x	1	4.670 980	580,00	435,00
OBE 124	Trinocular, 4x, 10x, 40x	1	4.670 981	600,00	517,50
OBE 131	Monocular, 4x, 10x, 40x, 100x (oil immersion)	1	4.670 982	540,00	405,00
OBE 132	Binocular, 4x, 10x, 40x, 100x (oil immersion)	1	4.670 983	640,00	480,00
OBE 134	Trinocular, 4x, 10x, 40x, 100x (oil immersion)	1	4.670 984	760,00	570,00

Microscope slide boxes, PS



Kartell

High impact. For 76 x 26 mm slides. Numbered slots in a base. Index card in a lid.

-30%

To hold microscope slides	Dimensions (W x D x H) mm	PK	Cat. No.	Price	Now
				EUR	EUR
25	83 x 98 x 38	1	9.161 380	24,90	17,43
50	97 x 230 x 35	1	9.161 381	37,10	25,97
100	180 x 230 x 35	1	9.161 382	52,70	37,59

Slide Mailer, PP



Kartell

For storing or shipping 5 thick or 10 thin slides.

-30%

Int. diam. mm	Height mm	PK	Cat. No.	Price	Now
				EUR	EUR
40	90	1	9.161 395	10,90	7,63

Staining jar, PMP (TPX®), Hellendahl pattern

Kartell



Accepts 16 slides 76 x 26 mm (8 pairs back to back). Transparent, with grooves. Complete with a lid.

-30%

Dimensions (W x D x H) mm	PK	Cat. No.	Price	Now
			EUR	EUR
58 x 53.5 x 86	1	9.161 350	23,30	16,31

LLG-Cuvette rack, PP



Ideal for storing up to 16 cuvettes with a 12.5 mm width. The two-tier arrangement of the cuvette rows ensures clarity.

- Numbered positions
- Autoclavable at 121 °C

-40%

Length	Width	Height	PK	Cat. No.	Price	Now
mm	mm	mm			EUR	EUR
210	70	35	2	4.682 061	24,20	14,52

LLG-Disposable plastic cells, PS

The shape and narrow wall thickness of the cuvettes enable an excellent heat transfer resulting in constant sample temperatures during photometric measurements.



- Cavity sorted
- Glass clear polystyrene (PS)
- Applicable wavelength range 340 nm to 900 nm
- Path length 10 mm
- Overall dimensions 12.5 mm x 12.5 mm x 45 mm
- Styrofoam racks: 100 cuvettes in a styrofoam box with cover



-40%

Description	Capacity	Operating range	PK	Cat. No.	Price	Now
	ml	nm			EUR	EUR
Macro	4.0	340 to 900	200	9.406 011	21,60	12,96
Semi-micro	1.6	340 to 900	200	9.406 012	22,60	13,56

Cells W600



Cells made of optical glass or Borosilicate glass 3.3, 21 mm x 40 mm, for instrument Models Fs, PFXi/PFX195, 880, 950 and 995. (Note: PFXi/PFX-195 max. path length 50 mm).

W600/OG/xx for unheated samples (up to 40 °C)
W600/B/xx for heated samples (up to max. 100 °C)

Further versions are available on request.

-5%

Type	Path length	Material	PK	Cat. No.	Price	Now
	mm				EUR	EUR
W600/OG/10	10	optical glass	1	6.207 120	60,00	57,00
W600/OG/33	33	optical glass	1	6.093 322	82,30	78,19
W600/OG/50	50	optical glass	1	6.207 119	93,40	88,73
W600/OG/100	100	optical glass	1	6.235 055	173,40	164,73
W600/OG/5¼"	133.35	optical glass	1	9.947 343	128,00	122,46
W600/B/10	10	Borosilicate glass 3.3	1	6.241 927	75,60	71,82
W600/B/33	33	Borosilicate glass 3.3	1	6.086 921	106,70	101,37
W600/B/5¼"	133.35	Borosilicate glass 3.3	1	9.947 345	166,70	158,37

Reflectance Spectrophotometer TRA 500/TRA 520



- 3,5" TFT Colour Display
- For reflectance measurements
- Flexible usage



Ergonomic and flexible reflection spectrophotometers with customer-specific apertures for the TR 500 and dual apertures for the TR 520 for measuring samples in different industries including food, medicine, coatings and plastics.

- CMOS sensor (256 picture elements, double array)
- Intuitive 3.5 inch TFT colour LCD (capacitive), symbol-based
- External memory with 2000 standards and 20000 samples
- Measurements are easy to read through the angled viewing window
- Integrated cover prevents the effects of extraneous light
- Dual apertures
- Measurement of fluorescent materials with UV on/off
- Extended range of illuminants
- Operation languages: English, French, German, Spanish, Portuguese, Chinese

Scope of supply: Spectrophotometer, complete accessories, sample cover, white background plate, 3 x optical glass cells (10, 20, 30 mm)

Specifications

Light source:	TRA 500 TRA 520 combined LED light combined LED light, UV light
Illuminant:	D65, A, C, D50, D55, D75, F2, F7, F11 D65, A, C, D50, D55, D75, F1, F2, F3, F4, F5, F6, F7, F8, F9, F10, F11, F12
Repeatability:	MAV/SCI: ΔE ≤ 0.05 MAV/SCI: ΔE ≤ 0.03
Inter instrument agreement:	MAV/SCI: ΔE ≤ 0.2 MAV/SCI: ΔE ≤ 0.15
Dimensions (W x D x H):	207 x 170 x 130 mm
Weight:	1200 g

-5%

Type	Aperture	PK	Cat. No.	Price	Now
	mm			EUR	EUR
TRA 500	8	1	4.672 168	8.687,00	8.253,51
TRA 520	10/8 + 5/4	1	4.672 167	10.065,40	10.417,13

Standards for Flame photometers



Suitable for calibration, control, IQ/OQ and method validation. Compatible with all Flame Photometry Instruments. Available as single-element analytical standards (in ppm) or Multi-element clinical standards (in mmol/l). NIST traceable. HDPE bottles of 500 ml.

Type	Measuring range	PK	Cat. No.	Price	
				EUR	Now
Barium	1000 ppm	1	4.012 213	142,90	92,89
Lithium	1000 ppm	1	4.012 214	142,90	92,89
Potassium	1000 ppm	1	6.210 151	120,60	84,24
Sodium	1000 ppm	1	6.210 152	142,90	92,89
Calcium	1000 ppm	1	6.210 153	142,90	92,89
Sodium / Potassium	100 / 100 mmol/L	1	4.012 215	142,90	92,89
Sodium / Potassium	120 / 2 mmol/L	1	4.012 216	142,90	92,89
Sodium / Potassium	140 / 5 mmol/L	1	4.012 217	142,90	92,89
Sodium / Potassium	160 / 8 mmol/L	1	4.012 218	142,90	92,89
Sodium / Potassium	160 / 80 mmol/L	1	4.012 219	142,90	92,89
Rinse solution	-	1	6.286 180	54,80	35,62

-35%

Turbidity Standards



Highly accurate turbidity standards composed of suspended microspheres, suitable for Instrument calibration and control of all turbidity meters. Stable, shelf life of 2 years (from Date of Manufacturing). NIST traceable, US EPA approved and tested in compliance with ISO 7027. HDPE bottles of 100 ml.

Two ranges available:

- Ratio range for Ratio Turbidity Measuring instruments (a measure of the scattered light from the sample at a 90° angle from the incident light, plus at additional angles (several detectors))
- Non-Ratio for Non-Ratio Turbidity Measuring instruments will measure the scattered light from the sample at a 90° angle from the incident light (one detector)

Description	Volume	PK	Cat. No.	Price	
				EUR	Now
Non Ratio 0.0 NTU	100 ml	1	6.233 961	118,00	76,70
Non Ratio 0.1 NTU	100	1	6.075 473	118,00	76,70
Non Ratio 20 NTU	100	1	6.233 962	165,10	107,32
Non Ratio 200 NTU	100	1	4.012 096	269,60	175,24
Non Ratio 800 NTU	100	1	4.012 099	269,60	175,24
Ratio 0.0 NTU	100	1	4.012 057	118,00	76,70
Ratio 0.1 NTU	100	1	6.233 012	123,90	80,54
Ratio 15 NTU	100	1	6.286 185	269,60	175,24
Ratio 100 NTU	100	1	4.012 076	269,60	175,24

-35%

Chemical Oxygen Demand (COD) Standards



These standards are ideal for use as control standards to verify that correct analysis for COD has taken place. Extensive range (10 to 60000 ppm), NIST traceable, 2 years shelf-life. HDPE bottle of 500 ml.

Type	Measuring range mg / l	PK	Cat. No.	Price	
				EUR	Now
COD10	10	1	4.012 235	195,80	127,27
COD20	20	1	6.286 181	155,40	101,01
COD50	50	1	6.234 998	155,40	101,01
COD100	100	1	6.234 999	155,40	101,01
COD200	200	1	6.206 516	155,40	101,01
COD500	500	1	6.234 552	155,40	101,01
COD600	600	1	6.206 517	155,40	101,01
COD1000	1000	1	6.232 202	155,40	101,01
COD1300	1300	1	6.206 518	155,40	101,01
COD1500	1500	1	6.238 379	155,40	101,01
COD2000	2000	1	6.286 182	155,40	101,01
COD3000	3000	1	6.286 183	384,00	249,60
COD5000	5000	1	4.012 236	155,40	101,01
COD6000	6000	1	6.286 184	155,40	101,01

-35%

Colour Standards Platinum-Cobalt (Hazen)



These colour standards can be used to calibrate, control, qualify or validate colour measurement instruments to determine the colour number. These standards are Platinum-Cobalt, Pt-Co, Hazen or APHA colour. All descriptions are interchangeable.

- Covers requirements of ASTM Method D 1209
- In 1 l HDPE bottle

Description	PK	Cat. No.	Price	
			EUR	Now
Pt-Co Hazen 0	1	4.012 117	124,40	100,80
Pt-Co Hazen 5	1	6.257 411	124,40	100,80
Pt-Co Hazen 10	1	6.235 802	124,40	100,80
Pt-Co Hazen 15	1	4.675 390	248,60	186,45
Pt-Co Hazen 20	1	6.257 412	248,60	186,45
Pt-Co Hazen 25	1	4.012 118	124,40	100,80
Pt-Co Hazen 30	1	4.675 391	441,90	331,43
Pt-Co Hazen 40	1	4.012 119	238,90	179,18

-25%

Analytical balances Adventurer® AX



- Fast stabilisation and reliable operation. Guarantees long-lasting weighing performance and accurate, repeatable results
- The touchscreen with a wide reading angle allows access to all applications
- Low space requirement due to two-part, top-mounted draft shield doors
- Features: Two-piece, top-mounted, space-saving draft shield with removable panels (0.1 mg and 0.001 g models). AutoCal™ automatic internal calibration or external calibration. Illuminated level control. Selectable environmental and auto pressure settings. Integrated below-balance weighing hook. Fully covering labour protection cover. Software lock switch

Specifications

Readability: 0.1 mg
 Ø weighing plate: 90 mm
 Power supply: 100...240 V/50/60 Hz

-20%

Type	Weighing range g	PK	Cat. No.	Price EUR	Now EUR
AX124	120	1	6.268 193	2.860,00	2.288,00
AX224	220	1	6.268 196	2.975,00	2.380,00
AX324	320	1	6.268 199	3.160,00	2.528,00

LLG-Hexagonal weighing boats, PS, antistatic, white



Biologically inert and resistant to dilute and weak acids, aqueous solutions, alcohols, and bases. Temperature range -10 to 70 °C. Can be used with microwave moisture analysers.

-35%

Size	Dimensions mm	PK	Cat. No.	Price EUR	Now EUR
Small	38 x 25 x 9	500	9.900 893	48,50	31,53
Medium	64 x 51 x 19	500	9.900 894	66,80	43,42
Large	102 x 76 x 22	500	9.900 895	122,40	86,06
X-Large	127 x 89 x 31	500	9.900 896	169,10	109,92

Precision Balances Adventurer® AX



- Fast stabilisation and reliable operation to ensure solid weighing performance and accurate, repeatable results
- The wide viewing angle 4.3" colour touchscreen provides access to all applications
- The 0.01 g models feature large weighing pans
- Communication: RS232, USB Host, USB Device (included). GLP/GMP compliant data output with real-time clock
- Design features: Two-piece, top-mounted, space-saving draft shield with removable panels on 0.1 mg and 0.001 g models. AutoCal™ automatic internal calibration or external calibration. Level assist feature with illuminated level indicator. Selectable environmental and auto-print settings. Integral weigh below hook. Protective full housing in-use cover. Software lock switch

-20%

Type	Weighing range g	Readability g	Plate dimensions mm	PK	Cat. No.	Price EUR	Now EUR
AX223	220	0.001	Ø 130	1	6.268 208	2.025,00	1.620,00
AX1502	1520	0.01	175 x 195	1	6.268 218	1.985,00	1.588,00
AX2202/E	2200	0.01	175 x 195	1	6.268 222	1.635,00	1.308,00
AX4202	4200	0.01	175 x 195	1	6.268 223	2.260,00	1.808,00

LLG-Weighing dishes, aluminium



Made from oil-free, lightweight aluminium. With a flanged, crimped wall for rigidity. Finger-tab handle can be etched for identification before weighing.

-35%

Ø mm	Height mm	Thickness mm	PK	Cat. No.	Price EUR	Now EUR
43	12	0.3	100	6.238 138	20,10	13,07
57	14	0.3	100	6.238 139	27,60	17,94
70	16	0.3	100	6.238 140	29,20	18,98
101 *	8	0.3	50	6.236 854	47,70	11,51

* without Finger-tab handle

Density meter DMA 501



Density meter for samples with difficult properties such as pasty, inhomogeneous, sedimenting, particle-containing, or even aerosol sprays. All relevant concentration tables and formulas for calculating product-specific parameters are installed in the DMA 501.

- Razor-sharp camera image of the measuring cell (U-View™) for viewing the correct sample filling
- Fanless temperature control of the sample
- Complete documentation and traceability of data
- Integrated temperature and humidity sensor for intelligent self-checking
- Integrated pressure sensor for adjustments
- Automatic full-range viscosity correction of the results
- 3-year warranty

Specifications

Density measuring range/Accuracy:	0 ... 3 g/cm ³ /0.001 g/cm ³
Reproducibility standard deviation (acc. to ISO 5725):	0.0004 g/cm ³
Minimal sample volume:	approx. 1 ml
Temperature range/Accuracy:	15 ... 40 °C/0.3 °C
Display:	7 inches, TFT WVGA (800 x 480 Px), PCAP touchscreen
Dimensions (W x D x H):	265 x 375 x 180 mm
Weight:	13.5 kg
Power supply:	100 .. 240 V, 47/63 Hz, 24 V, 3 A

Type	PK	Cat. No.	Price	Now
DMA 501	1	6.313 796	EUR 5.500,00	

Digital Anemometer



For the measurement of wind speed (in m/s, km/h, mph, knots, ft/min), maximum and average wind speed, an indication of temperature (in °C or °F). Useful for the functional check of fume hoods and safety cabinets.

Wind speed range:	0.2 to 30 m/s
Resolution:	0.1 m/s
Accuracy:	±5%
Temperature range:	-10 ... +45 °C (-14 ... + 113 °F)
Power supply:	3V CR2032 (included)

Dimensions (W x D x H) mm	PK	Cat. No.	Price	Now
58 x 19 x 104	1	6.264 198	EUR 42,90	EUR 27,89

-35%

Flocculation tester ET 730



Designed for efficiency testing of flocculation or precipitation agents.

- Illuminated back panel for glare-free observation of the samples
- Timer feature and digital display
- Height adjustment of the stirring blades during operation
- For beakers with 1000 to 1500 ml volume, tall and low form

Specifications

Speed control:	20, 40, 50, 100, 200 rpm
Timer:	0 ... 30 minutes (continuous)
Power Supply:	100 ... 240 V, 50/60 Hz

-10%

Dimensions (l x w x h) mm	PK	Cat. No.	Price	Now
250 x 320 x 250	1	9.699 301	EUR 1.613,60	EUR 1.452,24

Viscometers ViscoQC 100



ViscoQC 100 - L



These viscometers cover the entire viscosity range with three models: L for low viscosity, R for medium viscosity and H for highly viscous samples.

- Magnetic spindle coupling for a quick exchange of spindles
- Automatic spindle recognition Toolmaster™
- Automatic speed search TruMode™ finds the right speed for unknown samples
- Automatic spindle protection detection TruGuard™ for automatic detection of the guard
- 3.5" colour LC display
- Direct print/export



Scope of supply: Viscometer, Toolmaster™, magnetic coupling, 4 spindles (R and H) or 6 spindles (L) out of AISI 316L, tripod, power supply unit, USB-cable, data collection software V-Collect, printed SOP, instructions

Specifications

Temperature range:	15 ... 80 °C
Accuracy:	±1%
Repeatability:	±0.2%
Dimensions (L x W x H):	361 x 281 x 444 mm
Weight:	6.2 kg
Power supply:	100 ... 240 V, 47/63 Hz, 24 V, 3 A

-5%

Type	Viscosity range mPas	Max. torque Ncm	PK	Cat. No.	Price	Now
ViscoQC 100 - L	15 ... 6000000	0.00673	1	6.313 808	EUR 4.080,00	EUR 3.876,00
ViscoQC 100 - R	100 ... 40000000	0.07187	1	6.313 809	EUR 4.080,00	EUR 3.876,00
ViscoQC 100 - H	800 ... 320000000	0.57496	1	6.313 810	EUR 4.080,00	EUR 3.876,00

LLG-Centrifuge tubes, PP



Polypropylene tubes with excellent thermal, mechanical and chemical stability. With screw closures. Sterile tubes with screwed-on closure. Packed in boxes or bags. With graduations and labelling area.

Centrifugation capacity (Max. RCF): 6000 x g
Height: 120 mm

-30%

Description	Capacity	Diam.	PK	Cat. No.	Price	Now
					EUR	EUR
aseptic, bulk pack	15	17	50	6.263 886	16,20	11,34
big pack	15	17	500	9.316 063	120,40	84,28
big pack, bulk pack	50	30	50	4.008 506	19,90	13,93

LLG-Microcentrifuge tubes, PP



LLG-Microcentrifuge tubes are ideal for all test throughputs. These centrifuge tubes are very resistant to mechanical strain and highly resistant to temperature fluctuations and chemicals. The tubes have graduation marks for quick and easy volume checks. The ergonomic cap design with a click-lock mechanism ensures a secure seal and makes opening and closing easier. With a frosted labelling area on the housing.

Certified DNase-, RNase-, and pyrogen-free. Guaranteed metal-free. Suitable for microbiology.

Specifications

Autoclavability
Temperature: 121 °C
Pressure: 1.05 bar or 15 psi
Time: 20 min or less

Centrifugation

Fixed angle rotor: 25000 x g
Swing out rotor: 70000 x g

-30%

Form	Volume	Max.	PK	Cat. No.	Price	Now
					EUR	EUR
conical	1.5	25000	500	6.521 309	11,40	7,98
round	2.0	25000	500	6.521 310	13,45	9,42

Centrifuges Frontier™ Multi Pro FC5714



Allround Centrifuge



Powerful and versatile Universal Centrifuges for almost every laboratory application. The intuitive design of the centrifuges and accessories enables easy access to the parameter settings and quick change between applications.

Please order rotors separately.

Specifications

Max. RCF: 18.624 x g
Max. Speed: 14.000 rpm
Max. Load: 4 x 100 ml
Power consumption: 240 W
Dimensions (W x D x H): 362 x 493 x 330 mm
Weight: 30 kg
Power supply: 230 V, 50/60 Hz

-25%

Type	PK	Cat. No.	Price	Now
			EUR	EUR
FC5714	1	4.661 524	2.880,00	2.160,00

Fixed angle rotor for Frontier™ Multi Pro FC5714



-25%

Description	PK	Cat. No.	Price	Now
			EUR	EUR
Fixed angle rotor 12 x 15 ml, RB/FA, ID	1	4.661 550	725,00	543,75

ID: Auto rotor identification, RB: Round bottom tubes, FA: Conical bottom tubes



Digital dry bath LLG-uniBLOCKTHERM



Suitable for use in microbiological, histological, clinical, industrial and environmental laboratories. Various types of optional heating blocks are available as accessories for the LLG-uniBLOCKTHERM.

- Digital control with LED display
- For timer and continuous operation
- 1 x block unit
- With overheating protection

Scope of supply: LLG-uniBLOCKTHERM, removal tool, lid

Please order heating blocks separately.

Specifications

Temperature range:	RT ... 120 °C
Temperature uniformity:	±0.5 °C
Temperature accuracy:	±0.5 °C
Timer:	0 ... 99:59:00 min
Block material:	Aluminium
Dimensions (W x D x H):	175 x 290 x 85 mm
Weight:	3 kg
Power supply:	220 ... 240 V, 50/60 Hz
Warranty:	3 years

-40%

Type	Plug type	PK	Cat. No.	Price	Now
LLG-uniBLOCKTHERM	EU	1	6.263 460	EUR 618,30	EUR 370,98

Heating blocks for LLG-uniBLOCKTHERM



Dimensions Heating blocks (W x D x H): 95 x 150 x 50 mm

-16%

Description	PK	Cat. No.	Price	Now
			EUR	EUR
Heating block 54 x 0.2 ml	1	6.263 462	118,20	99,29
Heating block 40 x 0.5 ml	1	6.263 463	118,40	99,46
Heating block 40 x 1.5 ml	1	6.263 464	118,20	99,29
Heating block 40 x 2.0 ml	1	6.263 465	118,40	99,46
Heating block 28 x 5/15 ml	1	6.263 466	118,40	99,46
Heating block 8 x 50 ml	1	6.263 467	118,40	99,46
Heating block for 96/384 Microplate	1	6.263 468	118,40	99,46
Heating block for each 18 x 0.2, 0.5 and 1.5/2.0 ml	1	6.263 469	118,40	99,46
Heating block with aluminium beads	1	6.263 557	145,50	124,13

Mini cooling incubator LLG-uniINCU 20 cool



- Compact and space-saving
- High temperature stability
- With internal socket



Digital mini incubator with cooling and heating function for cultivation of biological samples in small-volume vessels. With an internal power outlet for positioning small shakers, mixers, or other devices in the inner chamber.

- Good temperature stability of the set temperature (up to 15 °C below ambient temperature)
- Large inner chamber with 22 l capacity
- Fast heating and homogeneous temperature
- With built-in calibration function of up to ±5 °C

Specifications

Temperature range:	Ambient - 15 °C ... 60 °C
Temperature accuracy:	±0.5 °C (at 37 °C)
Temperature uniformity:	±1.5 °C (at 37 °C)
External dimensions (WxDxH):	340 x 410 x 480 mm
Internal dimensions (WxDxH):	235 x 260 x 360 mm
Weight:	7.5 kg
Power supply:	100 ... 240 V, 50 ... 60 Hz

-30%

Type	Nominal capacity l	Plug type	PK	Cat. No.	Price	Now
LLG-uniINCU 20 cool	22	EU	1	6.263 572	EUR 1.021,20	EUR 714,84

LLG-Heat/Cold hand protector "TempHand", silicone rubber



Gripper made of red silicone rubber. Suitable for temperatures from -50 °C up to 250 °C. Two grip openings for quick and easy use. One size fits all, can be used on both sides. With non-slip grip surface.

-45%

Description	PK	Cat. No.	Price	Now
			EUR	EUR
LLG-Heat/Cold hand protector "TempHand"	1	6.322 889	36,90	20,30

Tube roller RM 2



Robust tube roller with gentle tilting and rolling movement. Suitable for all common tube sizes, bottles and other cylindrical vessels with a diameter of up to 80 mm.

- Gentle start-up for optimum development of cell cultures.
- Can be used at CO₂ concentrations up to 5%.
- Drip tray and plastic rollers can be removed for easy cleaning

Scope of delivery: basic unit including 6 removable plastic rollers and drip tray

Specifications

Type of movement:	rocking and rolling
Amplitude/angle:	15 mm, 3° fixed
Speed:	5 ... 80 rpm
Max. load:	2 kg
Number of rollers:	6
Timer:	0 ... 99 h 59 min/continuous
Temperature range:	5 ... 45 °C
Max. CO ₂ range:	5%
Max. humidity:	85%, not condensing
Dimensions (W x D x H):	244 x 465 x 115 mm
Roller size (l x Ø):	300 x 32 mm
Weight:	7.3 kg
Power supply:	100 ... 240 V, 50/60 Hz
Protection class:	IP 21

-15%

Type	PK	Cat. No.	Price	Now
RM 2	1	4.663 359	2.322,00	1.973,70

Vortexer MSV-3500 4P



Suitable for soft or intensive mixing of reagents in tubes of different sizes (0.2 to 50 ml).

- Two-line LCD shows set and actual values of time and speed
- Timer (0 to 60 min) or continuous operation

- Incl. four easy interchangeable platforms

Scope of supply: Vortexer, 4 attachments for tubes from 0.2 to 50 ml, operating instructions, manual

Specifications

Type of movement:	Orbital/vortex
Orbital diameter:	4 mm
Speed range:	300 ... 3500 rpm
Dimension (W x D x H):	180 x 170 x 145 mm
Power supply:	120 ... 230 V, 50/60 Hz

-15%

Type	PK	Cat. No.	Price	Now
MSV-3500 4P	1	7.983 339	692,00	588,20

Thermo shaker LLG-uniTHERMIX 1 pro



The LLG-uniTHERMIX 1 pro is ideal for shaking and tempering various tubes or plates (depending on the block used). The high-temperature stability, fast heating rate and excellent mixing results make it perfect for the life science sector. The heating blocks are magnetically attached to the LLG-uniTHERMIX 1 pro and do not need to be screwed in place.

- Easy and quick change of the heating blocks thanks to magnetic attachment
- Temperatures up to 100 °C
- Temperature accuracy of ±0.5 °C (at 20 ... 45 °C)
- Efficient mixing at up to 1500 rpm, depending on the block used
- Up to 9 programmes can be stored
- Automatic block recognition

Blocks must be ordered separately.

Scope of supply: thermal shaker

Specifications

Temperature range:	RT + 5 °C ... approx. 100 °C
Temperature control:	±0.5 °C (at 20 ... 45 °C)
Uniformity:	±0.5 °C (at 20 ... 45 °C)
Max. heating rate:	5.5 °C/min
Speed range:	300 ... 1500 rpm
Orbit:	3 mm
Display:	LCD
Programs:	6 stages, 9 programs
Timer:	1 ... 99 hours or continuous
Dimensions (W x D x H):	200 x 235 x 120 mm
Weight:	7.3 kg
Power supply:	220 ... 240 V, 50/60 Hz
Warranty:	3 years

-40%

Type	Plug type	PK	Cat. No.	Price	Now
LLG-uniTHERMIX 1 pro	EU	1	6.263 482	1.664,00	998,94

Heating blocks for LLG-uniTHERMIX 1 pro



-40%

For	PK	Cat. No.	Price	Now
24 tubes, 1.5 ml	1	6.263 487	361,00	216,60
24 tubes, 2 ml	1	6.263 494	361,00	216,60
8 tubes, 15 ml	1	6.263 496	409,30	245,58
4 tubes, 50 ml	1	6.263 497	409,30	245,58
96/384 microplate	1	6.263 499	361,00	216,60



Magnetic stirrer MSL 25 and MSL 50 Digital

Magnetic stirrer with powerful, brushless motor for mixing large quantities. The recessed control panel protects against leaking liquids.

- Clear LCD
- Soft start
- SpeedServo™ technology keeps the speed constant even when viscosity changes
- Programmable auto-reverse function to change the direction of rotation
- Safety lock prevents unintentional changes to settings



MSL 25 Digital




MSL 50 Digital


Specifications	MSL 25 MSL 50
Stirring quantity:	25 l 50 l
Speed range:	40 ... 1500 rpm 20 ... 1000 rpm
Timer:	1 min ... 99 h 59 min
Dimensions (W x D x H):	253 x 269 x 71 mm 354 x 369 x 77 mm
Power supply:	100 ... 240 V, 50 ... 60 Hz

Type	Plug type	PK	Cat. No.	Price	Now
MSL 25 Digital	EU	1	6.313 616	EUR 570,00	EUR 513,00
MSL 50 Digital	EU	1	6.491 202	1.539,00	1.385,10

-10%

Multi-position Magnetic stirrer AMI 4, illuminated

 Stirring plates individually controllable

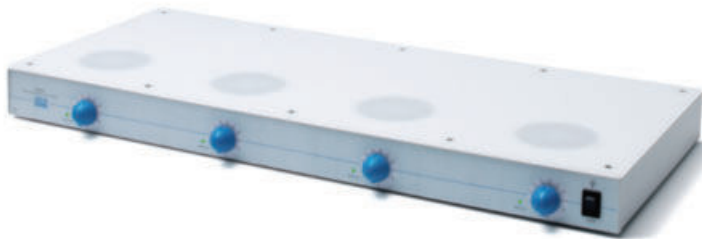

Multi-position magnetic stirrer with illuminated stirring positions for stirring volumes up to 5 l per position. With epoxy-coated metal housing.

- 4 stirring positions, individually adjustable
- Gentle start-up
- Illuminated stirring positions
- Electronic speed control up to 1100 rpm
- Low height

Specifications	
Stirring volume each (H ₂ O):	5 l
Speed (max.):	1100 rpm
Distance between stirring positions:	150 mm
Dimensions (W x D x H):	600 x 270 x 55 mm
Power supply:	100 ... 240 V, 50/60 Hz
Warranty:	3 years

Type	PK	Cat. No.	Price	Now
AMI 4	1	4.666 685	EUR 1.036,00	EUR 932,40

-10%

Multi-position magnetic stirrer MULTISTIRRER Digital



With epoxy painted, robust steel housing and stainless steel set-up plate for protection against leaking liquids. Bright LED display for accurate speed monitoring and timer for unattended operation.

- Synchronous speed of all stirring positions
- Adjustable, time-controlled auto-reverse function
- Torque compensation to keep the speed constant in case of viscosity changes
- Also suitable for use with water baths

Specifications	MULTISTIRRER Digital 6 // Digital 15
Max. volume each (H ₂ O):	400 ml // 250 ml
Power rating:	3,6 W // 15,9 W
Speed range:	80 ... 1500 rpm
Number of stirring positions:	6 // 15
Distance between stirring positions:	100 mm // 74 mm
Stirring positions:	Ø 85 mm // Ø 64 mm
Timer:	1 ... 900 min
Auto reverse:	5 ... 900 min
Dimensions (W x D x H):	230 x 370 x 51,5 mm
Power supply:	100 ... 240 V, 50/60 Hz
Warranty:	3 years

Type	PK	Cat. No.	Price	Now
MULTISTIRRER Digital 6	1	4.666 681	EUR 725,00	EUR 652,50
MULTISTIRRER Digital 15	1	4.666 682	1.045,00	940,50

-10%

Magnetic stirrer TWISTER



- Innovative Design
- Modular System

IKA®



Without heating. The TWISTER is a universal and particularly compact mixing device with a magnetic drive, which can be expanded to a multi-position magnetic stirrer with a wide range of applications by connecting up to 30 devices in series. The stirring points can be controlled either separately or simultaneously (leader-follower principle).

- Intuitive and chemically resistant 360° LED glass display for conveying all information without an alphanumeric display
- Integrated beaker detection
- Changing the direction of rotation in definable intervals (reverse function).
- Suitable for operation in incubators up to 40 °C
- Cleaning under the tap is possible

- Set 1 Scope of delivery:** 1 x TWISTER magnetic stirrer, 1 x plug-in power supply unit with adapter, magnetic stirring bar
- Set 2 Scope of delivery:** 2 x magnetic stirrers TWISTER, 1 x plug-in power supply unit with adapter, 2 x magnetic stirring bars
- Set 3 Scope of delivery:** 3 x TWISTER magnetic stirrers, 1 x plug-in power supply unit with adapter, 3 x magnetic stirring bars
- Set 4 Scope of delivery:** 4 x TWISTER magnetic stirrers, 1 x plug-in power supply unit with adapter, 4 x magnetic stirring bars

Specifications

Max. stirred volume per position:	5 l
Speed range:	100 ... 3000 rpm
Permissible ambient temperature:	5 ... 40 °C
Permissible relative humidity:	80%
Material Top plate:	Glass
Dimensions Top plate (W x D):	124 x 124 mm
Dimensions (W x D x H):	135 x 135 x 24 mm
Weight:	0.6 kg
Power supply:	100 ... 240 V, 50/60 Hz
IP code:	IP 66

-15%

Type	Stirring capacity	PK	Cat. No.	Price	Now
	l			EUR	EUR
TWISTER Set 1	5	1	4.685 997	437,00	371,45
TWISTER Set 2	10	1	4.685 998	816,00	693,60
TWISTER Set 3	15	1	4.685 999	1.208,00	1.026,80
TWISTER Set 4	20	1	4.686 000	1.588,00	1.349,80

Rocking shakers Duomax 1030

heidolph
research made easy



The Duomax 1030 rocking shakers generate a 2-dimensional tilting movement and are suitable for Petri dishes, culture flasks, Erlenmeyer flasks and all standard vessels.

- With overheating protection that switches the device off in an emergency, important for unattended continuous use
- Infinitely adjustable speeds for all common standard vessels
- With timer function

Specifications

Type of movement:	rocking
Tumbling angle:	5° or 10°
Speed range:	2 ... 50 rpm
Max. Load:	5 kg
Timer:	1 ... 120 min
Permissible ambient temperature:	5 ... 31 °C
Permissible relative moisture:	80%
Platform dimensions (W x D):	290 x 258 mm
Power supply:	230 V, 50/60 Hz
Protection class acc. to DIN EN 60529:	IP 40

-5%

Type	Inclination angle	PK	Cat. No.	Price	Now
	°			EUR	EUR
Duomax 1030	5	1	9.839 855	1.857,00	1.764,15
Duomax 1030	10	1	9.839 856	1.845,00	1.752,75

Overhead stirrers OHS Digital

Powerful, robust overhead stirrers with display and electronic speed control. With integrated timer and overload, overtemperature and overcurrent protection.

- Stable torque over the entire speed range with automatic compensation
- Torque indication in the LED display
- Timer
- USB interface for installing software updates

Specifications

Speed range:	30 ... 2000 rpm (OHS 100 Digital: 30 ... 1300 rpm)
Power rating:	190 W
Chuck range:	Ø 1 ... 13 mm
IP code:	IP 54
Power supply:	230 V, 50/60 Hz
Warranty:	3 years



VELP
SCIENTIFICA

-10%

Type	Stirring capacity	max. Viscosity	PK	Cat. No.	Price	Now
	l	mPa.			EUR	EUR
OHS 20 Digital	25	10000	1	4.666 660	944,00	846,90
OHS 40 Digital	25	25000	1	4.666 659	1.018,00	916,20
OHS 60 Digital	40	50000	1	4.666 658	1.162,00	1.045,80
OHS 100 Digital	100	70000	1	4.666 657	1.262,00	1.135,80

LABORTOPS

LLG-Magnetic stirrer RCT standard 2.0

The next generation of the IKA/LLG-Labware top seller LLG-RCT Standard.



- Digital controlled speed and temperature
- Clearly arranged LED display
- Digital display of set safety temperature limit
- Hot top indicator, hot surface warning to prevent burns
- Adjustable safety circuit of heating plate temperature
- Digital error code display
- Connection for external PT1000 temperature probe
- Aluminium hotplate for optimal heat transfer
- Enhanced safety due to improved heat control technology
- USB interface
- Powerful motor
- Improved magnetic coupling
- Supplied with housing protection cover
- Tested acc. to DIN EN IEC 61010-1



- Complete set with PT 1000 and protective cover
- Large display
- Made in Germany

Scope of supply: Magnetic stirrer, temperature probe PT1000, screwdriver, protective cover, C16 mains cable (H11)



Specifications

Max. stirring quantity (H ₂ O):	20 l
Speed range:	50 ... 1500 rpm
Heating plate:	Ø 135 mm
Temperature range:	RT + device self-heating ... 310 °C
Heat output:	600 W
Safety temperature range:	50 ... 360 °C
Dimensions (W x D x H):	160 x 270 x 85 mm
Weight:	2.4 kg
Power supply:	220 ... 230/115/100 V, 50/60 Hz
IP code:	IP 42
Warranty:	3 years

-25%

Type	Plug type	PK	Cat. No.	Price	Now
LLG-Magnetic stirrer RCT standard 2.0	EU	1	6.320.400	EUR 752,90	EUR 564,68